


2x  $\phi 4.22 \pm 0.20$  [.166 ± .008] thru  
 $\square \phi 9.53 \pm 0.25$  [.375 ± .010]  
 contact OD

$\phi 25.4 \pm 0.5$  [1.000 ± .020] O.D.

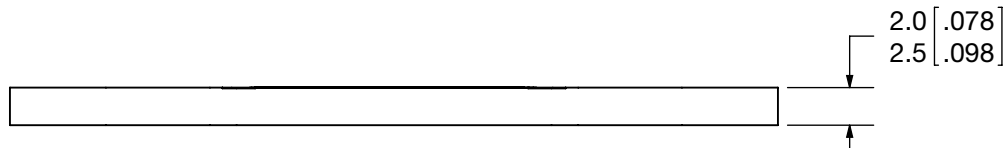

Typical	
Resistance*	9 - 15 $\Omega$
Voltage	40 volts
Current	10 amps
Power	300 watts
*Resistance Room Temp: R@800°C ~ 1/2R Room Temp	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MOMENTIVE PERFORMANCE MATERIALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MOMENTIVE PERFORMANCE MATERIALS IS PROHIBITED.

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.

**DIMENSIONS ARE IN: mm [in]**

TOLERANCES: UNLESS OTHERWISE SPECIFIED  
 ANGULAR: MACH  $\pm .5^\circ$   
 TWO PLACE DECIMAL:  $\pm .3$  [0.01]  
 THREE PLACE DECIMAL:  $\pm .13$  [0.005]

	NAME	DATE
DRAWN BY:	JMM	3/31/08
ENGINEER:	TJH	
APPROVED BY:	TJH	4/16/08
CNC:		
ITEM #:	HTR0003	
CMM#		
WORK ORDER:		
SALES ORDER:		



TITLE:  
**HT-03 Standard Heater**  
**\*\*External Final\*\***

EXPORT CONTROL STATUS:

**IS THIS DOCUMENT EXPORT CONTROLLED?** **No**

MATERIAL:  
 PBN/PG  
 TREATMENT:

FORMER UCAR/ACC #:  
 HTR\_0139A

CUST DWG #:

RFQ #:

ITEM #:  
 HTR0003  
 CMM#

WORK ORDER: SALES ORDER:

DRAWING NUMBER:  
**080358**

REV  
 -

TITLEBLOCK VERSION:  
 MOMENTIVE TITLEBLOCK A INCH V1.0 4/07

SCALE: 1:1

SHEET 1 OF 1