

## SAG™ TP-317

### SAG\* TP-317

#### Description

Silicone Antifoam SAG TP-317 is a new generation of diesel fuel antifoams. It is based on a modified polydimethyl siloxane and contains no halogen.

#### Key Features and Benefits

- Easily compatible with most diesel fuel additive packages.
- Low Silicon content (9%)
- Low addition levels to diesel fuel.
- Durable effect. No significant loss in antifoam performance after four weeks ageing.
- Low water solubility, this makes Silicone Antifoam SAG TP-317 less prone to deactivation by the small amounts of water present in the diesel fuel.

#### Typical Physical Properties

PROPERTY	UNIT	VALUE
Appearance	-	Clear to slightly yellow liquid
Viscosity @ 25°C	mm <sup>2</sup> ·s <sup>-1</sup>	480
Freezing Point	°C (°F)	< -32 (-80)
Flash Point, PMCC	°C (°F)	>100 (230)
Refractive Index @ 22°C	-	1.440
Apparent specific gravity at 20°C	-	1.03
Volatility @ 50°C, 24 hours	%	6.2
Volatility @ 50°C, 5 days	%	22.7
Solubility	SAG TP-317 is soluble in alcohols and aromatic hydrocarbons. It is partially soluble in water	

Table 1: Typical product data values determined on commercial material whose properties might vary within the specification limits. Typical product data values should not be used as

specifications. Assistance and specifications are available from Momentive Performance Materials.

### Potential Applications

A suggested starting level would be in the 8-15 ppm range addition to the diesel fuel. The actual concentration of SAG TP-317 required will depend on the exact composition of the diesel fuel and the degree of foam control required.

Silicone Antifoam SAG TP-317 can be added if needed to the diesel additive package by the use of an alcohol like 2-Ethyl Hexanol or Isodecanol and / or aromatic solvents. It is added to the diesel additive package at around 1-2% and the latter to the diesel fuel at a standard 200-500 ppm concentration level which gives an optimal concentration level of 8-10 ppm of Silicone Antifoam SAG TP-317 in the diesel fuel.


In a typical laboratory test varying levels of silicone antifoam SAG TP-317 were dissolved in diesel fuel at ambient temperature (with a predilution in isodecanol), 100 ml aliquots were shaken for 30 seconds in a 250 ml tin flask using a mechanical shaker and the time taken for a clear patch of surface to appear was recorded. The test was run at a fixed temperature of 19°C. To run the test under more critical foaming conditions, a diesel fuel containing 150 ppm water was used.

The SAG TP-317 was evaluated at 2 different concentrations (8 ppm and 15 ppm) and over a 6 week period of time to check SAG TP-317 for changes in antifoam performance with time.

The results are shown in Table 1:

Relative Collaps Time (% of foam height of Control)		
Weeks	8 ppm	16 ppm
0	9%	3%
1	11%	4%
2	14%	5%
3	19%	6%
4	16%	7%
5	35%	8%
6	46%	9%

These are relative results. They have been compared against the foaming height of diesel fuel without any additive, which was set at a value of 100%. A suggested starting level would lie in the 10-20 ppm range. The actual concentration of SAG TP-317 required will depend on the exact composition of the diesel fuel and the degree of foam control required.

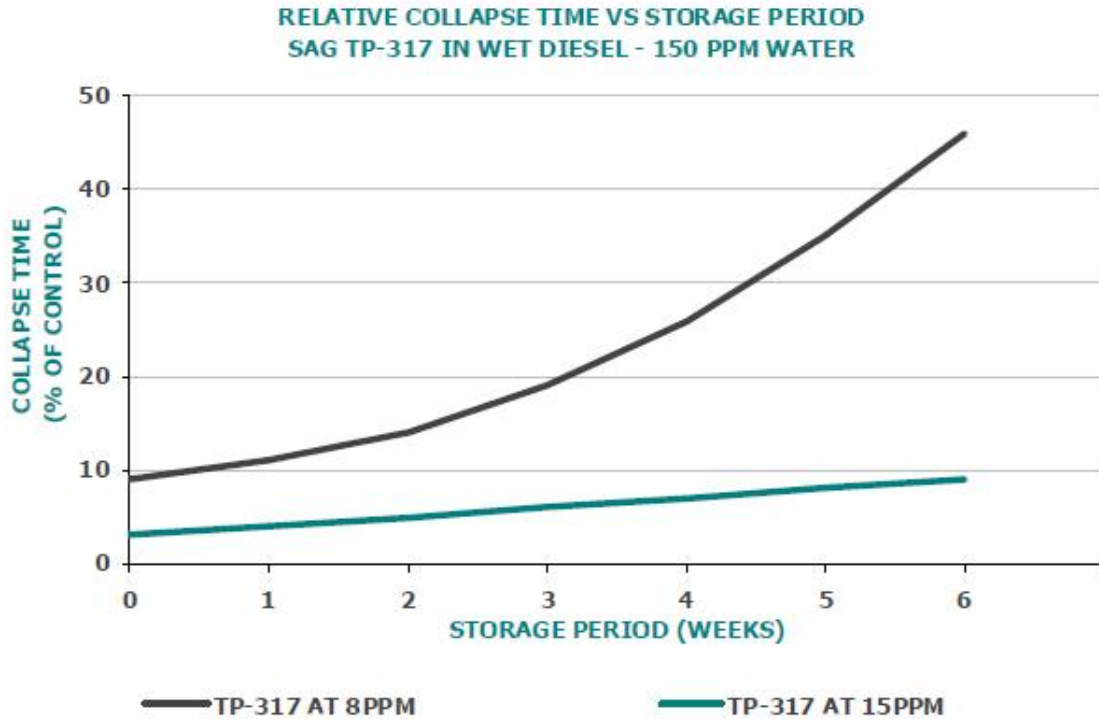

**Packaging**

SAG TP-317 Diesel Fuel Antifoam is available in 25kg pails, 210kg drums and 1000kg IBCs.

**Patent Status**

Standard copy to come

**Product Safety, Handling and Storage**

SAG TP-317 Diesel Fuel Antifoam is best stored at temperatures between 0°C and 40°C. Keep container closely sealed to prevent contamination with moisture or dirt.

Standard copy to come

**Limitations**

Standard copy to come

**Contact Information**

Email  
[commercial.services@momentive.com](mailto:commercial.services@momentive.com)

**Telephone**

<b>Americas</b>	<b>Latin America</b>	<b>EMEAI- Europe, Middle East, Africa &amp; India</b>	<b>ASIA PACIFIC</b>
+1 800 295 2392	<b>Brazil</b>	<b>Europe</b>	<b>China</b>
Toll free*	+55 11 4534 9650	+390510924300	800 820 0202
+704 805 6946	Direct Number	Direct number	Toll free
Direct Number			+86 21 3860 4892
			Direct number
*All American countries	<b>Mexico</b>	<b>India, Middle East &amp; Africa</b>	<b>Japan</b>
	+52 55 2169 7670	+ 91 44 71212207	+81 3 5544 3111
	Direct Number	Direct number*	Direct number
		<b>*All Middle Eastern countries, Africa, India,</b>	<b>Korea</b>
			+82 2 6201 4600

For literature and technical assistance, visit our website at: [www.momentive.com](http://www.momentive.com)

**DISCLAIMER:**

**THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY “SUPPLIER”), ARE SOLD SUBJECT TO SUPPLIER’S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER’S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of Supplier’s materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier’s products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary,

supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

\*SAG™ ist ein Markenname der Momentive Performance Materials Inc.

The use of the "™" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.