


# ECC3050S conformal coating

ENGINEERED MATERIALS - MICRO ELECTRONICS

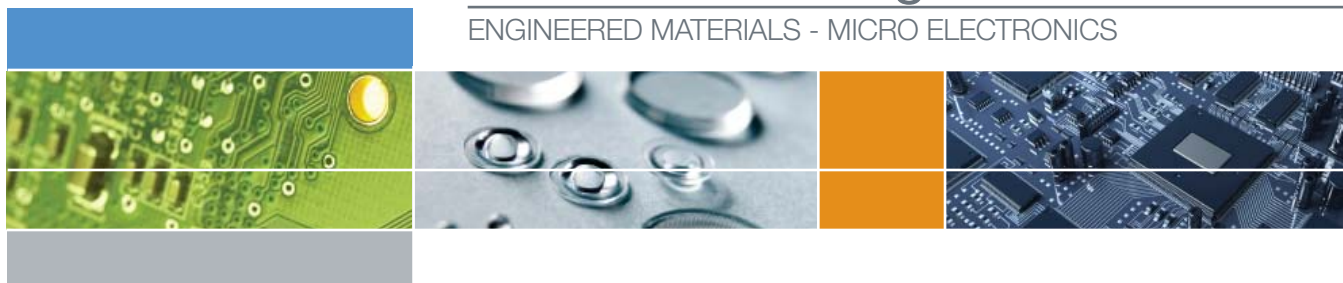

ECC3050S conformal coating is a low viscosity, solventless silicone coating that cures very rapidly, at room temperature, to a soft, transparent silicone rubber. ECC3050S conformal coating can also be cured using a low temperature oven process to reduce cure and handling times, making it an excellent candidate to consider for high volume production conformal coating of printed circuit board assemblies with temperature limited components.

### Key Features and Typical Benefits

- Fast Curing - typically ready to handle in just minutes
- Solventless Formulation - low VOC formulation
- Low Temperature Cure - room/low temperature cure (<60°C) generally safe for sensitive components
- Low Viscosity - generally suitable for spray or flow coating application
- Excellent Adhesion - outstanding long term moisture protection
- Low Modulus/Low Stress - minimizes coating-induced CTE stress to sensitive components

### Typical Physical Properties

#### UNCURED PROPERTIES

Viscosity, at 23°C [mPa*s]	550
Tack-Free Time <sup>(1)</sup> , minutes (@ 23°C/73°F, 50% RH)	5
Cure Time <sup>(1)</sup> , minutes (@ 23°C/73°F, 50% RH)	30
Cure Time <sup>(1)</sup> , minutes (@ 60°C/140°F, 15% RH)	2

(1) 100µm (4 mils) thickness

#### CURED PROPERTIES (3 days @ 23°C/73°F, 50% RH)

Appearance	Transparent
Specific Gravity (23°C)	0.98
Hardness - Type A	22
Volume Resistivity MW•m {ohm•cm}	1x10 <sup>7</sup> {1x10 <sup>15</sup> }
Dielectric Strength kV/mm (v/mil)	20 (508)
Dielectric Loss (@ 60Hz)	0.001
Dielectric Constant (@ 60Hz)	2.60

# ECC3050S conformal coating

## General Instructions for Use

### Surface Preparation

The cleanliness of the circuit board substrate is critical to successful application of the conformal coating and its long-term performance. Surfaces must be free of moisture, dirt, wax, grease and other contaminants. Failure to remove contamination can lead to long-term failure of the circuit assembly.

### Solder Flux

Solder flux residues on the surface of a printed circuit board can greatly impact the performance of a conformal coating by interfering with coating adhesion and possibly interfering with the coating's cure mechanism. This is of particular concern when using 'no-clean' flux systems. Careful compatibility testing, with the flux system to be used, is strongly recommended.

### Application Method

ECC3050S conformal coating can be applied by spray or flow coating. Because ECC3050S conformal coating reacts with atmospheric moisture, dip coating and brush coating are not recommended for volume production operations. The use of atmospherically controlled application equipment is strongly recommended in order to maximize available work life. Spray coating should be done in an enclosed and ventilated area.

### Curing

ECC3050S conformal coating typically cures under room temperature conditions. Depending upon ambient conditions, coated circuit boards may be cured in as little as 30 minutes. The use of a low temperature oven cure (<60°C) may significantly reduce cure/handling times to as little as three minutes. Curing should be done in a ventilated oven. Actual cure time at a given temperature for a given part is dependent upon a variety of factors, including applied thickness of coating, heat sink characteristics of the part being coated, type of oven (i.e. convection, IR, etc.), and oven loading factors. For more detailed information of the curing properties of ECC3050S conformal coating, contact Momentive Performance Materials.

Many of Momentive's materials may meet the requirements for homogeneous materials under 2002/95/EC (RoHS). Please refer to our website, [www.momentive.com](http://www.momentive.com), for additional information.

## ECC3050S conformal coating

### Patent Status

Technical subject matter in this publication is described and protected by one or more pending US patent applications and foreign counterparts.

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

### Product Safety, Handling and Storage

(MSDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, and any special storage conditions required for safety. MSDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any Momentive Performance Materials (MPM) representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

### Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

### Emergency Service

---

Momentive Performance Materials maintains an around-the-clock emergency service for its products.

<u>Location</u>	<u>Emergency Service Provider</u>	<u>Emergency Contact Number</u>
Mainland U.S., Puerto Rico	CHEMTREC	1-800-424-9300
Alaska, Hawaii	CHEMTREC	1-800-424-9300
Canada	CHEMTREC	1-800-424-9300
Europe, Israel	NCEC	+44 (0) 1235239670
Middle East	NCEC	+44 (0) 1235239671
Asia Pacific (except China)	NCEC	+44 (0) 1235239670
China	NCEC	+86-10-5100-3039
Latin America (except Brazil)	NCEC	+44 (0) 1235239670
Brazil	SOS Cotec	08000111767 or 08007071767
All other locations world wide	NCEC	+44 (0) 1235239670
At sea	Radio U.S. Coast Guard in U.S. waters NCEC in International waters	+44 (0) 1235239670

For Health related calls, contact Momentive Performance Materials at +1-518-233-2500 (English only).

---

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

## Customer Service Centers

### Worldwide

4information@momentive.com

+1 614 986 2495 / T +1 800 295 2392

### North America

#### Silicones

T +1 800 332 3390

#### Consumer Sealants/ Construction Sealants and Adhesives

T +1 877 943 7325

### Latin America

#### South America

T +55 11 4534 9650

#### Mexico and Central America

T +52 55 2169 7670

### Europe, Middle East, Africa and India

T +00 800 4321 1000 / +40 21 3111848

### Pacific

#### China

T +800 820 0202 / +86 21 3860 4892

#### Japan

T +0120 975 400 / +81 276 20 6182

#### Korea

T +82 2 6201 4600

#### Malaysia

T +60 3 9206 1532

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Holdings Inc.



22 Corporate Woods Boulevard  
Albany, NY 12211 USA  
momentive.com