


2x  $\varnothing 3.05 \pm 0.2$  [.12±.008] I.D. thru  
 $\square$   $\varnothing 5.99 \pm 0.25$  [.236±.01]  
 contact O.D.

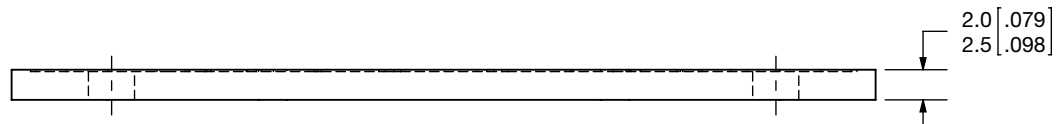

Typical	
Resistance*	15 - 25 $\Omega$
Voltage	50 volts
Current	8 amps
Power	300 watts
*Resistance Room Temp: R@800°C ~ 1/2R Room Temp	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MOMENTIVE PERFORMANCE MATERIALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MOMENTIVE PERFORMANCE MATERIALS IS PROHIBITED.

EXPORT CONTROL STATUS:  
**IS THIS DOCUMENT EXPORT CONTROLLED?** **No**

MATERIAL: PBN/PG  
 TREATMENT:  
 FORMER UCAR/ACC #: HTRST4, HTR\_0688  
 CUST DWG #:

**DIMENSIONS ARE IN: mm[in]**  
 TOLERANCES: UNLESS OTHERWISE SPECIFIED  
 ANGULAR: MACH± .5°  
 TWO PLACE DECIMAL: ± .3 [0.01]  
 THREE PLACE DECIMAL: ± .13 [0.005]

NAME: JMM  
 DATE: 3/28/08  
 ENGINEER: TJH  
 APPROVED BY: TJH 4/16/08  
 CNC:  
 ITEM #: HTR0021  
 CMM#  
 WORK ORDER: SALES ORDER:



TITLE: HT-21 Standard Heatr Final  
 \*\*External Details\*\*

DRAWING NUMBER: 080346  
 REV: -

SCALE: 2:1 SHEET 1 OF 1

TITLEBLOCK VERSION:  
 MOMENTIVE TITLEBLOCK A INCH V1.0 4/07