

SILQUEST* A-1871

epoxy silane

SILANES - ADHESIVES & SEALANTS ADDITIVES



Silquest A-1871 silane is an epoxy functional silane that may be used as an adhesion promoter in polysulfide, urethane, epoxy and acrylic caulks, sealants, adhesives and coatings.

Key Features and Typical Benefits

Silquest A-1871 silane contains functional groups with two distinct reactivities; an epoxide capable of reacting with a variety of organic functionalities and alkoxy silane groups that can bond strongly to many inorganic substrates. This ability to chemically link select organic resins to inorganic substrates may offer improved wet and dry adhesion without the potential for yellowing that is present with amino functional adhesion promoters. The ability of silanol groups to self condense also offers the possibility of using Silquest A-1871 silane as a crosslinking agent in some resin systems.

The most significant difference between Silquest A-1871 silane and the familiar Silquest A-187* silane is in the alkoxy substitution. Silquest A-1871 silane is ethoxy not methoxy substituted. This means Silquest A-1871 silane will generate ethanol upon hydrolysis instead of methanol, and under the same conditions will hydrolyze more slowly. The release of ethanol rather than methanol may prove useful when methanol emissions are a concern.

Typical Physical Properties

	Silquest A-1871 Epoxy Silane
CAS Number	2602-34-8
Appearance	Clear, pale
Molecular Weight	278.42
Specific Gravity at 25/25°C	1.0034
Refractive Index n_D 25°C	1.4260
Flash Point, Tag Closed Cup, °C (°F)	118 (245)
Boiling Point, °C (°F)	304 (579)

Solubility

Silquest A-1871 silane is soluble in water after hydrolysis, and also in alcohol, acetone and aliphatic esters such as methyl acetate at normal application levels under five percent. Hydrolysis releases ethanol.


SILQUEST* A-1871 epoxy silane

Key Features and Typical Benefits (continued)

Possible benefits from the use of Silquest A-1871 epoxy silane may include:

- Improved substrate adhesion in many waterborne acrylic and vinyl-acrylic caulks, adhesives and coatings. Use of epoxy silane may avoid the yellowing sometimes seen when amino functional adhesion promoters are used.
- Crosslinking of waterborne latexes and dispersions; acrylic, styrene acrylic or other copolymers, polyurethane or epoxy dispersions, may provide outstanding chemical resistance and mechanical properties to coatings, adhesives or sealants.
- Enhanced adhesion to glass and metal substrates in polyurethane resins, often providing improved shelf stability over aminosilane alternatives.
- Enhanced electrical properties of epoxy based electronic encapsulants and packaging materials, resulting from improved bonding between resin and substrate or filler. Improved wet adhesion reduces the risk of semiconductor or integrated circuit failure as a result of water ingress or surface corrosion.
- Improved wet and dry adhesion, tensile strength and water resistance of quartz-filled epoxy encapsulants, sand-filled epoxy concrete repair materials, and metal-filled epoxy resins for mold die tools.
- Improved adhesion to glass and metal substrates for epoxy, polysulfide, urethane and acrylic-based adhesives, sealants and caulks.

Chemical Structure

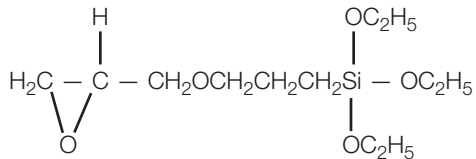

Gamma – Glycidoxypropyltriethoxysilane

SILQUEST* A-1871 epoxy silane

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.momentive.com or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC) and CareChem24 International also maintain an around-the-clock emergency service for all chemical products:

<u>Location</u>	<u>Momentive Performance Materials Products</u>	<u>All Chemical Products</u>
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CHEMTREC: 800.424.9300
Europe	+518.233.2500 (Albanian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbo-Croatian, Slovak, Spanish, Swedish, Turkish, Ukrainian)	+44.(0)208.762.8322 (UK)
Middle East, All countries, except Israel	+518.233.2500	+961.3.487.287 (Lebanon)
Middle East, Israel	+518.233.2500	+44.(0)208.762.8322 (UK)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300.	

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

CUSTOMER SERVICE CENTERS

North America	E cs-na.silicones@momentive.com		
	• Specialty Fluids	T +1.800.523.5862	F +1.304.746.1654
	• UA, Silanes and Specialty Coatings	T +1.800.334.4674	F +1.304.746.1623
	• RTVs and Elastomers	T +1.800.332.3390	F +1.304.746.1623
	• Consumer Sealants & Construction Sealants and Adhesives	T +1.877.943.7325	F +1.304.746.1654
Latin America	E cs-la.silicones@momentive.com		
	• Argentina & Chile	T +54.11.4862.9544	F +54.11.4862.9544
	• Brazil	T +55.11.4534.9650	F +55.11.4534.9660
	• Mexico & Central America	T +52.55.2169.7670	F +52.55.2169.7699
	• Venezuela, Ecuador, Peru, Colombia & Caribbean	T +58.212.285.2149	F +58.212.285.2149
Europe, Middle East, Africa and India	E cs-eur.silicones@momentive.com	T +00.800.4321.1000 T +40.21.3111848	
Pacific	E cs-ap.silicones@momentive.com		
	• China	T +1.800.820.0202 or T +86.21.3860.4892	F +86.21.5079.3725
	• Japan	T +0120.975.400 or T +81.276.20.6182	F +81.276.31.6259
	• Korea	T +82.2.6201.4600	F +82.2.6201.4601
	• Malaysia	T +60.3.9206.1532	F +60.3.9206.1533
	• Thailand	T +662.207.3456	F +66.2207.3488
Worldwide Hotline		T +1.607.786.8131 T +1.800.295.2392	F +1.607.786.8309

Visit us at Momentive.com



Momentive Performance Materials
22 Corporate Woods Boulevard
Albany, NY 12211

*Silquest and Silquest A-187 are trademarks of Momentive Performance Materials Inc.
Momentive is a trademark of Momentive Performance Materials Holdings LLC.
Copyright 2003-2011 Momentive Performance Materials Inc. All rights reserved.

MOM-112-103-40E-GL 02/11 Printed in U.S.A.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.