

# CoatOSil\* MP 200 Silane Crosslinker for Waterborne Coatings




## MARKETING BULLETIN

**CoatOSil MP 200 silane is an epoxy functional silane oligomer for use as a coupling agent, adhesion promoter and crosslinker for waterborne coatings using acrylic, styrene-acrylic, vinyl-acrylic, polyurethane dispersions, epoxy dispersion and other anionic or cationic binders.**

This product comprises a polyfunctional structure bearing gamma-glycidoxy groups, which can allow for reduced emission of methanol upon hydrolysis of the material as compared with typical monomeric epoxy silanes.

### Key Features and Typical Benefits

The gamma-glycidoxy propyl epoxide ring available in CoatOSil MP 200 silane can react with many different organic functionalities, while the alkoxy silane groups still available on the oligomeric structure typically bond strongly to inorganic substrates and fillers. Being a 100% active material, CoatOSil MP 200 silane can be considered for waterborne, solvent borne or powder coating systems. The oligomeric structure of CoatOSil MP 200 silane can help deliver the following advantages over typical monomeric silanes:

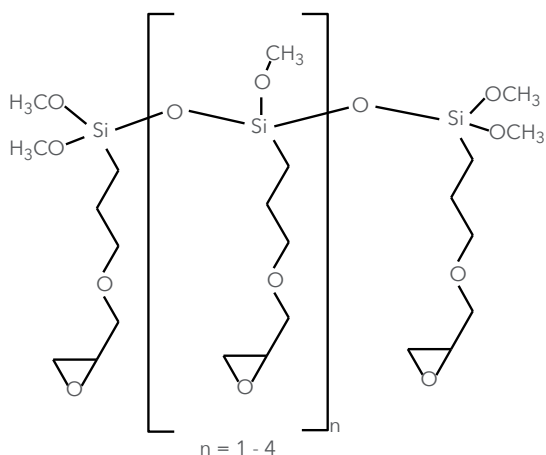

Indicative Structure

Feature	Benefit
More active silane	Lower loading rate
Partially hydrolyzed and condensed silane	Lower alcohol liberation
Siloxane network	Water and UV resistance Higher hydrolytic stability
Poly-epoxy alkoxy silane structure	Faster grafting rate into polymers Faster curing rate

Typical performance benefits include:

- Improved abrasion and scrub resistance, particularly in highly-filled formulations using silane-reactive fillers such as talc and kaolin (calcined or hydrous)
- Improved adhesion to concrete, glass and metals (cold-rolled steel, HDG and aluminum, etc.)
- Improved chemical and corrosion resistance
- Improved hardness

## General Considerations for Use

Typical product use level varies from 0.1 wt% to 2 wt% of binder solid content depending on desired performance attributes.

## Guidelines for Incorporation in Waterborne Systems

### *Incorporation in Latex/Binder*

Latex/Binder manufacturers can incorporate CoatOSil MP 200 silane and supply to coatings formulators as a regular binder. It is advisable to incorporate CoatOSil MP 200 silane at the end of polymerization, after the biocide and base addition, at a temperature <40 °C. Latex pH should be maintained below 9 and as close to neutral as possible. Sufficient mixing after epoxy silane addition typically ranges between 15-30 minutes under medium to high shear. Depending on the binder chemistry, CoatOSil MP 200 silane incorporation and equilibration in a finished latex may take from 1 hour up to 24 hours; however, no change in physical properties such as particle size or viscosity over that time period and after storage typically occurs.

### *Incorporation during Formulation*

CoatOSil MP 200 silane can be added at any stage of coating formulation. In the pigment grinding stage, it can be added along with other liquid ingredients before pigment addition (TiO<sub>2</sub> and/or fillers). In lab scale evaluations, it is recommended to allow the pigment paste to equilibrate over typical grinding duration in manufacturing to mimic realistic conditions. CoatOSil MP 200 silane can also be added at any step in the letdown stage before or after binder addition. It is recommended to experiment with different stages of addition to identify optimal conditions for desired performance and stability. To help ensure effective incorporation of CoatOSil MP 200 silane, equilibrate formulated coatings overnight before application and performance testing.

## CoatOSil MP 200 Silane in Acrylic Latex for Improved Water Resistance

### 42.2% PVC Exterior Sample Formulation

	Ingredients	Parts per weight	Parts per weight	
Mill Base	Demineralized Water	260	260	
	Propylene Glycol	10	10	
	Antiseptic	2	2	
	Thickener	2.5	2.5	
	Defoamer	1.3	1.3	
	Ammonia (25% aq.sol.)	0.5	0.5	
	Dispersant	4.2	4.2	
			10 mins	
		TiO <sub>2</sub>	185	185
		Kaolin	120	120
		CaCO <sub>3</sub>	45	45
		30 mins		
Let Down	Demineralized Water	3.4	3.4	
	<b>Latex Blank</b>	<b>330</b>		
	<b>Latex with CoatOSil MP 200 silane</b>		<b>330</b>	
	Defoamer	0.6	0.6	
	Ammonia (25% aq.sol.)	0.5	0.5	
	Coalescence Solvent	10	10	
	Antiseptic	15	15	
Thickener	10	10		
<b>Total</b>		<b>1000</b>	<b>1000</b>	

Note: Product formulations are included as illustrative examples only. Momentive makes no representation or warranty of any kind with regard to any such formulations, including, without limitation, concerning the efficacy or safety of any product manufactured using such formulations.

0.1% CoatOSil MP 200 Modified Commercial Acrylic Latex by Weight

**Acrylic Latex**

Peeled off after 2 hrs. of being immersed in water



**Acrylic Latex containing CoatOSil MP 200 silane**

Did not peel off after 2 hrs. of being immersed in water

Note: Test results. Actual results may vary.

**Acrylic latex modified with CoatOSil MP 200 silane demonstrated a significant improvement in water resistance**



CoatOSil MP 200 Silane in 2K Waterborne Epoxy Coating for Improved Corrosion Resistance

WB Epoxy Dispersion Sample Formulation

Ingredients Part A	Weights (g)
EPI-REZ† 6520 WH53	300.00
Coalescence Solvent	27.52
Dispersant	2.69
Filler (TiO2, MICA, CaCO3, Kaolin)	326.91
EPI-REZ 6520 WH53	147.18
CoatOSil MP 200 silane	5.00
Demineralized Water	79.88
Ingredients Part B	Weights (g)
EPIKURE† 6870W53	109.93
Corrosion Inhibitor	0.89
<b>Total</b>	<b>1000</b>

Part A and Part B were mixed together and then the paint was sprayed onto the steel substrate. CoatOSil MP 200 silane 0.5% in the total paint by weight. Controlled VOC less than 100 g/l.

Note: Product formulations are included as illustrative examples only. Momentive makes no representation or warranty of any kind with regard to any such formulations, including, without limitation, concerning the efficacy or safety of any product manufactured using such formulations.

Neutral Salt Spray Test (ASTM B117)

Knife scratching after 240 hrs. on smooth steel



No silane

CoatOSil 1770 silane

CoatOSil MP 200 silane

Note: Test results. Actual results may vary.

**WB epoxy modified by CoatOSil MP 200 silane demonstrated significantly improved corrosion resistance**

**CoatOSil MP 200 silane in solventborne systems**

CoatOSil MP 200 silane can be considered for use as an adhesion promoter or binder on polysulfide, urethane, epoxy and acrylic caulks, sealants, adhesives, and coatings. The product is a polyfunctional structure bearing gamma-glycidoxy groups, which is an excellent candidate to consider to reduce emissions of methanol upon hydrolysis of the material as compared with monomeric epoxy silanes.

**CoatOSil MP 200 Silane in Solventborne High-Solid Two-Pack Epoxy Primer for Corrosion Protection****SB Epoxy Dispersion Sample Formulation**

<b>Ingredients Part A</b>	<b>Weight</b>
Epikote† 834-X-80	26.91
Wetting Agent	0.47
Dispersant	0.54
Mix first part prior to pigment dispersion-introduce under dispersion	
Iron Oxide Pigment	26.16
Zinc Phosphate	5.58
Talc	11.77
CaCO <sub>3</sub>	2.27
Basofo	7.68
<b>Dispersion 1500 rpm/30 min. Max. temp. 40 C-Hegmann Gauge = 5</b>	
Epikote† 834-X-80	2.75 to 4.75
CoatOSil MP 200	0 to 2
Mix Component Part A-600 rpm	
MEK	3.12
1 Methoxy-2-Propanol	0.78 to 1.56
Xylene	0 to 1.53
<b>Ingredients Part B</b>	<b>Weight</b>
Epokure† 3055	7.66 to 9.47
Ratio Epoxy (Resin+CoatOSil MP 200 silane) / Amine: 1,1.1 or 1.2	
Catalyst Epikure† 3253	0 or 0.5
Total	100

Note: Product formulations are included as illustrative examples only. Momentive makes no representation or warranty of any kind with regard to any such formulations, including, without limitation, concerning the efficacy or safety of any product manufactured using such formulations.

**Based on the sample formulation 2K high solid epoxy primer as shown above, wet and dry adhesion were measured with and without catalyst**

Standard / CoatOSil MP 200 silane



Epoxy / Amine  
1 / 1

NSS 96 hours +  
Tape adhesion



4 Cycles;  
NSS 96 hours +  
Tape adhesion

Standard / CoatOSil MP 200 silane



Note: Test results. Actual results may vary.

**CoatOSil MP 200 silane demonstrated significantly increased corrosion resistance and improved wet and dry adhesion**



## Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

## Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

## Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any MPM representative.

For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.



## Customer Service Centers

**Worldwide**

Email: commercial.services@momentive.com

**Americas**+1 800 295 2392  
+1 614 986 2495**Europe, Middle East,  
Africa and India**00800 4321 1000  
+40 213 044229**Latin America**

+55 11 4534 9660

**Asia Pacific****China**  
800 820 0202  
+86 21 3860 4892**All Other Countries**  
+60 3 9206 1543**Japan**0120 975 400  
+81 276 20 6182

## Disclaimer

FORMULATIONS ARE ILLUSTRATIVE EXAMPLES AND DO NOT REPRESENT COMMERCIALIZED PRODUCTS. They have not been subjected to extensive testing and Momentive makes no representation or warranty of any kind with regard to any such formulations, including, without limitation, concerning the performance, efficacy or safety of any product manufactured using such formulations. EACH USER BEARS FULL RESPONSIBILITY FOR (1) MAKING ITS OWN DETERMINATION AS TO THE SUITABILITY AND LEGAL COMPLIANCE OF ANY FORMULATION, MATERIALS, RECOMMENDATIONS, OR ADVICE FOR ITS OWN PARTICULAR USE, (2) IDENTIFYING AND PERFORMING ALL TESTS AND ANALYSES NECESSARY TO ASSURE THAT ITS FINISHED PRODUCTS BASED UPON EXAMPLE FORMULATIONS AND/OR INCORPORATING MENTIONED PRODUCTS, MATERIALS, OR SERVICES WILL BE SAFE AND SUITABLE FOR USE UNDER END-USE CONDITIONS, AND (3) OBTAINING ANY NECESSARY GOVERNMENT OR REGULATORY CLEARANCE, LICENSE OR REGISTRATION.

Any reference to a third party's materials is not an endorsement of those materials or an endorsement by the third party of Momentive materials. Momentive has not undertaken a comprehensive patent or other intellectual property search on the formulations. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

BEFORE HANDLING ANY PRODUCTS MENTIONED, REVIEW THE LATEST SAFETY DATA SHEET (SDS) AND LABEL FOR PRODUCT SAFETY INFORMATION, SAFE HANDLING INSTRUCTIONS, PERSONAL PROTECTIVE EQUIPMENT IF NECESSARY, EMERGENCY SERVICE CONTACT INFORMATION, AND ANY SPECIAL STORAGE CONDITIONS REQUIRED FOR SAFETY. MOMENTIVE MAINTAINS AN AROUND-THE-CLOCK EMERGENCY SERVICE FOR ITS PRODUCTS. SDS FOR MOMENTIVE PRODUCTS ARE AVAILABLE AT WWW.MOMENTIVE.COM OR, UPON REQUEST, FROM ANY MOMENTIVE REPRESENTATIVE. USE OF OTHER MATERIALS IN CONJUNCTION WITH MOMENTIVE PRODUCTS MAY REQUIRE ADDITIONAL PRECAUTIONS. PLEASE REVIEW AND FOLLOW THE SAFETY INFORMATION PROVIDED BY THE MANUFACTURER OF SUCH OTHER MATERIALS.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier.