


MAGNASOFT* Derma NT textile enhancer

SPECIALTY FLUIDS - TEXTILES & LEATHER

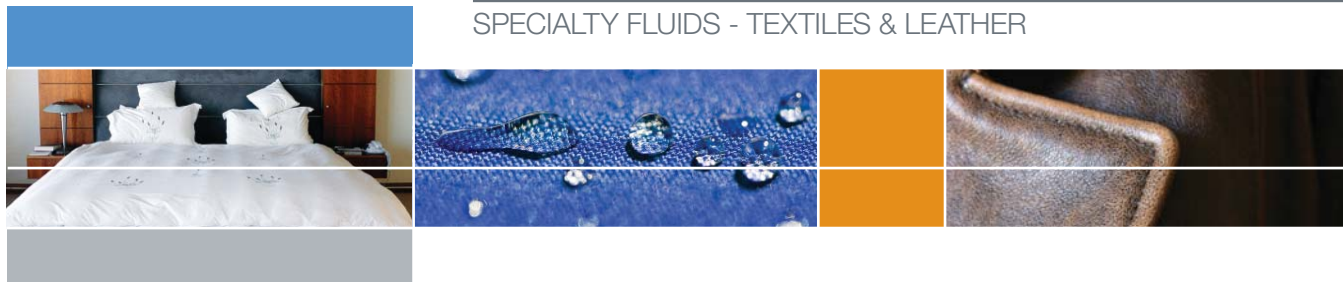

Magnasoft Derma NT textile enhancer is a patented, quat functional silicone copolymer with a repeating block structure that combines several chemical entities in one linear molecule. Close to self-emulsifiable, Magnasoft Derma NT textile enhancer can be applied by spray but is particularly well suited for exhaust applications, where its outstanding emulsion stability allows it to deliver full benefits to the end user.

Magnasoft Derma NT textile enhancer is a new textile auxiliary agent designed to deliver a hydrophilic, voluminous, silky hand to all types of fabrics at lower use levels than other products and, very significantly, to retain these performance attributes through several home laundry cycles.

Key Features and Typical Benefits

- combines a silky feel and a rich, bulky hand for a unique and unusually powerful softness effect
- does not alter the hydrophilic nature of cotton and cotton blends
- increases the hydrophilicity of synthetics
- provides stretch recovery with a significant elastomeric effect particularly on knits
- gives in depth softness
- is effective on virtually all types of fibers
- provides softness and durability effects that are fast to at least ten home laundry washes, and that are particularly pronounced with cellulosic fibers.
- almost self-emulsifiable; can generate emulsions that possess extreme shear and pH stability (acid and alkaline)
- causes virtually no yellowing of white or light shade goods
- does not affect the color of dark fabrics
- odor free

Typical Physical Properties

Appearance	Colorless to slightly brown fluid
Viscosity, cSt, 25°C/77°F	15,000
Density, gr/cm ³	0.980

MAGNASOFT* Derma NT textile enhancer

Potential Applications

Magnasoft Derma NT textile enhancer is a textile auxiliary agent that may add significant value to all types of knit and woven fabrics. Magnasoft Derma NT textile enhancer is particularly effective on knits where it provides the typical silicone softener effects and also increases their stretch recovery. Magnasoft Derma NT textile enhancer is effective on woven fabrics and is compatible with durable press resin and fluorocarbon soil release finishes.

Magnasoft Derma NT textile enhancer is normally applied as a water emulsion. Due to its polar nature, Magnasoft Derma NT textile enhancer can be easily emulsified using simple mixing devices and containers widely available throughout the industry. There is no need for homogenization or colloid milling.

Emulsions of Magnasoft Derma NT textile enhancer possess extraordinary shear stability in a wide pH range (3-12) at temperatures up to boiling and in the presence of high concentrations of salts. Tests carried out in a jet dyer (liquor to goods ratio 1:10, 40°C /104°F, pH 4-5, 20 min, pump level 6) demonstrated excellent emulsion stability. As a result, Magnasoft Derma NT textile enhancer can be used under very demanding conditions (jet finishing, EVAC, etc.).

Performance Comparison

The data presented in Table 2, demonstrate excellent softness, good wettability and no yellowing of various fabrics treated with Magnasoft Derma NT textile enhancer. The various products listed in these tables were emulsified to a 20% actives emulsion and used at either 15 g/lit (for the 0.25% silicone pick up) or at 30 g/lit (for the 0.5% silicone pick up).

Table 1: Microemulsions of Magnasoft Derma NT Textile Enhancer

Ingredients	Twenty Percent Actives Formulation Weight %	Forty-Three Percent Actives Formulation Weight %
Magnasoft Derma NT textile enhancer	23.5	50.6
Tridecyl Alcohol 6 EO Ethoxylate	10.5	25.8
Tridecyl Alcohol 12 EO Ethoxylate	1.8	4.45
Glacial Acetic Acid	0.4	1.00
Sodium Acetate	0.3	0.75
Water	63.5	17.4

Procedure

1. Charge Magnasoft Derma NT textile enhancer and ethoxylates. Mix well till fully homogeneous.
2. Dissolve the sodium acetate and acetic acid into the water.
3. Slowly add the water solution to the silicone/surfactant blend while mixing. Avoid stirring too much air into the mixture.
4. Filter into the containers.

Table 2. Performance of Magnasoft Derma NT Textile Enhancer

	Add-on (% BOWF)	Softness Rating ⁽¹⁾	Wicking Height (mm) ⁽²⁾	Wettability (sec.) ⁽³⁾	Whiteness ⁽⁴⁾
100% Cotton Terrycloth					
Magnasoft Derma NT textile enhancer	0.25	6.1	52	4	77
Magnasoft Derma NT textile enhancer	0.5	6.5	49	5	76
Magnasoft HSSD textile softener	0.25	4.2	55	Instant	78
Magnasoft Prime textile softener	0.25	6.0	50	9	77
Untreated	-	1.0	39	3	79
100% Cotton Knit					
Magnasoft Derma NT textile enhancer	0.25	6.5	70	12	64
Magnasoft Derma NT textile enhancer	0.5	6.4	69	10	63
Magnasoft HSSD textile softener	0.25	4.3	79	Instant	65
Magnasoft Prime textile softener	0.25	6.4	66	8	63
Untreated	-	1.3	60	5	66
65/35 Polyester/Cotton					
Magnasoft Derma NT textile enhancer	0.25	6.2	48	20	70
Magnasoft Derma NT textile enhancer	0.5	6.2	49	18	70
Magnasoft HSSD textile softener	0.25	4.3	56	2	71
Magnasoft Prime textile softener	0.25	6.0	55	20	72
Untreated	-	1.0	53	8	72
100% Polyester					
Magnasoft Derma NT textile enhancer	0.25	5	66	6	62
Magnasoft Derma NT textile enhancer	0.5	4.5	65	5	61
Magnasoft HSSD textile softener	0.25	5.3	65	Instant	62
Magnasoft Prime textile softener	0.25	6.2	65	11	64
Untreated	-	2.7	39	76	65
100% Nylon					
Magnasoft Derma NT textile enhancer	0.25	5.1	70	11	65
Magnasoft Derma NT textile enhancer	0.5	5.9	65	9	68
Magnasoft HSSD textile softener	0.25	4.3	59	1	61
Magnasoft Prime textile softener	0.25	5.9	67	5	66
Untreated	-	1.0	33	>300	64

(1) The softness rating is based on a scale of 1 to 8, with 8 being the softest.

(2) The wicking height is measured in mm.

(3) (AATCC Test Protocol 70-1995) The wettability (or hydrophilic) rating is measured in seconds.

(4) (AATCC Test Method 110-1995) The whiteness rating compares the percent reflectance after treatment to the percent reflectance of white standard, or control. The higher the number, the whiter the fabric.

MAGNASOFT* Derma NT textile enhancer

Performance Comparison (continued)

The data presented in Table 3 demonstrate the durable character of Magnasoft Derma NT textile enhancer on two types of fabric. Remarkably, we found that after ten home laundries, almost half of the silicone that was originally deposited on the 100% cotton knit was still present.

Table 3: Wash Permanency of Magnasoft Derma NT Textile Enhancer

	Percent Total Silicone on Fabric (BF3 digestive method)	Number of Home Laundries
100% Cotton Knit	100	0
	55	5
	50	10
65/35 Polyester/Cotton	100	0
	68	1
	49	3
	43	5

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.momentive.com or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC) and CareChem24 International also maintain an around-the-clock emergency service for all chemical products:

Location	Momentive Performance Materials Products	All Chemical Products
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CHEMTREC: 800.424.9300
Europe	+518.233.2500 (Albanian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbo-Croatian, Slovak, Spanish, Swedish, Turkish, Ukrainian)	+44.(0)208.762.8322 (UK)
Middle East, All countries, except Israel	+518.233.2500	+961.3.487.287 (Lebanon)
Middle East, Israel	+518.233.2500	+44.(0)208.762.8322 (UK)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300.	

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

CUSTOMER SERVICE CENTERS

North America	E cs-na.silicones@momentive.com		
	• Specialty Fluids	T +1.800.523.5862	F +1.304.746.1654
	• UA, Silanes and Specialty Coatings	T +1.800.334.4674	F +1.304.746.1623
	• RTVs and Elastomers	T +1.800.332.3390	F +1.304.746.1623
	• Consumer Sealants & Construction Sealants and Adhesives	T +1.877.943.7325	F +1.304.746.1654
Latin America	E cs-la.silicones@momentive.com		
	• Argentina & Chile	T +54.11.4862.9544	F +54.11.4862.9544
	• Brazil	T +55.11.4534.9650	F +55.11.4534.9660
	• Mexico & Central America	T +52.55.2169.7670	F +52.55.2169.7699
	• Venezuela, Ecuador, Peru, Colombia & Caribbean	T +58.212.285.2149	F +58.212.285.2149
Europe, Middle East, Africa and India	E cs-eur.silicones@momentive.com	T +00.800.4321.1000	
		T +40.21.3111848	
Pacific	E cs-ap.silicones@momentive.com		
	• China	T +1.800.820.0202 or T +86.21.3860.4892	F +86.21.5079.3725
	• Japan	T +0120.975.400 or T +81.276.20.6182	F +81.276.31.6259
	• Korea	T +82.2.6201.4600	F +82.2.6201.4601
	• Malaysia	T +60.3.9206.1532	F +60.3.9206.1533
	• Thailand	T +662.207.3456	F +66.2207.3488
Worldwide Hotline		T +1.607.786.8131	F +1.607.786.8309
		T +1.800.295.2392	

Visit us at Momentive.com



Momentive Performance Materials
22 Corporate Woods Boulevard
Albany, NY 12211

*Magnasoft is a trademark of Momentive Performance Materials Inc.
Momentive is a trademark of Momentive Performance Materials Holdings LLC.
Copyright 2003-2011 Momentive Performance Materials Inc. All rights reserved.

MOM-134-096-50E-GL 04/11 Printed in U.S.A.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.