


NIAX* Silicone L-6635

URETHANE ADDITIVES - RIGID FOAM

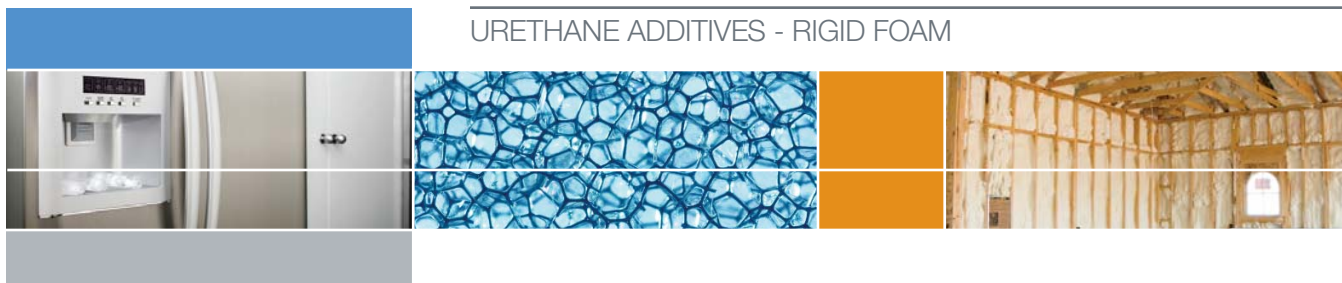

Niax silicone L-6635 is a premium silicone copolymer, and is an excellent candidate for rigid polyurethane foams manufactured with a continuous lamination process where it will deliver optimum foam surface quality mainly by reducing surface and sub-surface voids.

It is also a versatile surfactant exhibiting good foam stabilization and blowing agent compatibilization that can be effectively used in many other rigid foam applications where those effects are required.

Key Features and Typical Benefits

- Niax silicone L-6635 is recommended for foams produced by continuous lamination, pentane blown and with both polyurethane (PUR) and polyisocyanurate (PIR) chemistry. In this application it gives optimum foam surface quality. It's performance has been found excellent with n-pentane as the blowing agent, especially when high levels are used.
- Niax silicone L-6635 reduces cell coalescence during foaming and under high shear stress conditions, thus minimizing the formation of voids migrating to the foam-substrate interface. This makes it a great material candidate for fixed gap lamination with either a stationary or traversing head on rigid metal sheet or for flexible gas tight facings where the absence of defects at the foam surface is important.
- Niax silicone L-6635 reduces foam anisotropy and improves compression strength and dimensional stability while maintaining fine cells. It may therefore also be suited for the block and discontinuous process. In addition to pentane blown foam it can be used with HFC's or water blown.
- The common use level range for Niax silicone L-6635 is 1.5 to 4 parts per hundred of polyol (php), the voids reduction effect increases with increasing the level.
- Niax silicone L-6635 offers excellent stability and compatibility with hydrocarbon blowing agents.

Typical Physical Properties

| | |
|---|-------------------------------|
| Form | Clear to slightly hazy liquid |
| Viscosity at 25°C, cSt | 500 |
| Pour Point, °C (°F) | 15 (59) |
| Specific Gravity, 25°C | 1.05 |
| Flash Point, Pensky Martens closed cup (ASTM D 93), °C (°F) | 90 (194) |

NIAX* Silicone L-6635

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.momentive.com or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC) and CareChem24 International also maintain an around-the-clock emergency service for all chemical products:

| <u>Location</u> | <u>Momentive Performance Materials Products</u> | <u>All Chemical Products</u> |
|---|--|-------------------------------------|
| Mainland U.S., Puerto Rico | 518.233.2500 | CHEMTREC: 800.424.9300 |
| Alaska, Hawaii | 518.233.2500 | CHEMTREC: 800.424.9300 |
| Canada | 518.233.2500 | CHEMTREC: 800.424.9300 |
| Europe | +518.233.2500 (Albanian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbo-Croatian, Slovak, Spanish, Swedish, Turkish, Ukrainian) | +44.(0)208.762.8322 (UK) |
| Middle East, All countries, except Israel | +518.233.2500 | +961.3.487.287 (Lebanon) |
| Middle East, Israel | +518.233.2500 | +44.(0)208.762.8322 (UK) |
| Latin America, Asia/Pacific, all other locations worldwide | +518.233.2500 | CHEMTREC: +1-703.527.3887 (collect) |
| At sea | Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300. | |

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

CUSTOMER SERVICE CENTERS

| | | | |
|---------------------------------------|---|--|--------------------|
| North America | E cs-na.silicones@momentive.com | | |
| | • Specialty Fluids | T +1.800.523.5862 | F +1.304.746.1654 |
| | • UA, Silanes and Specialty Coatings | T +1.800.334.4674 | F +1.304.746.1623 |
| | • RTVs and Elastomers | T +1.800.332.3390 | F +1.304.746.1623 |
| | • Consumer Sealants & Construction Sealants and Adhesives | T +1.877.943.7325 | F +1.304.746.1654 |
| Latin America | E cs-la.silicones@momentive.com | | |
| | • Argentina & Chile | T +54.11.4862.9544 | F +54.11.4862.9544 |
| | • Brazil | T +55.11.4534.9650 | F +55.11.4534.9660 |
| | • Mexico & Central America | T +52.55.2169.7670 | F +52.55.2169.7699 |
| | • Venezuela, Ecuador, Peru, Colombia & Caribbean | T +58.212.285.2149 | F +58.212.285.2149 |
| Europe, Middle East, Africa and India | E cs-eur.silicones@momentive.com | T +00.800.4321.1000 | |
| | | T +40.21.3111848 | |
| Pacific | E cs-ap.silicones@momentive.com | | |
| | • China | T +1.800.820.0202 or T +86.21.3860.4892 | F +86.21.5079.3725 |
| | • Japan | T +0120.975.400 or T +81.276.20.6182 | F +81.276.31.6259 |
| | • Korea | T +82.2.6201.4600 | F +82.2.6201.4601 |
| | • Malaysia | T +60.3.9206.1532 | F +60.3.9206.1533 |
| | • Thailand | T +662.207.3456 | F +66.2207.3488 |
| Worldwide Hotline | | T +1.607.786.8131 | F +1.607.786.8309 |
| | | T +1.800.295.2392 | |

Visit us at Momentive.com



Momentive Performance Materials
22 Corporate Woods Boulevard
Albany, NY 12211

*Niax is a trademark of Momentive Performance Materials Inc.
Momentive is a trademark of Momentive Performance Materials Holdings LLC.
Copyright 2003-2011 Momentive Performance Materials Inc. All rights reserved.

MOM-124-053-30E-GL 03/11 Printed in U.S.A.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.