

Silwet* 641 Concentrate



MARKETING BULLETIN

SPECIALTY FLUIDS - AGRICULTURE

Silwet 641 concentrate is a synergistic combination of nonionic and organosilicone surfactants allowing formulators to develop a potentially cost-effective adjuvant mix using methyl soyate, which has been shown to not have the environmental impact of many other surfactants. Developed to provide superior spreading on most foliar surfaces, this property and the fast penetration through the cuticular layer, delivered by the methyl soyate, are well matched for the creation of a unique product for a very effective spray application of pesticide treatments.

This optimized concentrate offers additional typical advantages to growers. Organosilicone surfactants are well known for requiring much lower water use in pesticide spray applications than conventional surfactants since they provide better foliar spreading and rainfastness. In addition, the dual action of methyl soyate and Silwet 641 concentrate can enable lower adjuvant use rates than conventional spray adjuvants.

Key Features and Typical Benefits

- Enhanced spreading
- Low dynamic surface tension for enhanced foliar contact
- Formulated without NPE
- Easy to disperse
- The components in Silwet 641 concentrate meet the requirements of the U.S. EPA regulation 40 CFR 180.910, and are therefore exempt from tolerances in food when used as an inert ingredient in agricultural applications in accordance with the other conditions of that regulation.

Typical Physical Properties

Property	Unit	Value
Appearance	-	Colorless, clear to slightly hazy liquid
Spread Diameter (0.25%)	mm	48
Viscosity at 25 °C	cPs	70
Aqueous pH (10%)	-	6.8
Cloud Point	°C	45

Potential Applications

Silwet 641 concentrate may be considered for use as a surfactant component in methylated seed oil based adjuvants. It can be added directly to such formulations to provide better spreading during spray applications. Typical formulation use levels range from 10% to 30% depending on the spreading/uptaking properties desired.

Silwet 641 concentrate should not be used with mineral oil or standard vegetable oil.

Table 1: Typical Guide Formulations for Silwet 641 concentrate

Ingredients	MSO Spreader Formulation [weight%]	MSO Spreader Formulation [weight%]	Notes
Silwet 641 concentrate	10.0	20.0	Spreader-penetrant
Methylated Seed Oil	90.0	80.0	Penetrant

Procedure


Charge Silwet 641 concentrate and Methylated Seed Oil. Mix well until fully homogeneous.

Table 2: Typical Dosages for Silwet 641 concentrate/MSO Formulations

Formulation	Dosage [weight%]	Volume L/ha	Notes
Silwet 641 concentrate/MSO 10/90	0.50-1.00	100-200	Hard to wet crops/weeds ⁽¹⁾
	0.50-1.00	100-300	Easy to wet crops/weeds ⁽²⁾
Silwet 641 concentrate/MSO 20/80	0.50	100-200	Hard to wet crops/weeds
	0.25	100-300	Easy to wet crops/weeds
Silwet 641 concentrate/MSO 30/70	0.25-0.50	100-200	Hard to wet crops/weeds
	0.25	200-300	Easy to wet crops/weeds

Formulation	Dosage [L/ha]	Volume	Notes
Silwet 641 concentrate/MSO 10/90	0.5-2.0	100-200	Hard to wet crops/weeds ⁽¹⁾
	0.5-3.0	100-300	Easy to wet crops/weeds ⁽²⁾
Silwet 641 concentrate/MSO 20/80	0.5-1.0	100-200	Hard to wet crops/weeds
	0.25-0.75	100-300	Easy to wet crops/weeds
Silwet 641 concentrate/MSO 30/70	0.25-1.0	100-200	Hard to wet crops/weeds
	0.5	200-300	Easy to wet crops/weeds

Figure 1: Spreading diameter of formulations comprising 10 to 20% of Silwet 641 concentrate and 80 to 90% MSO

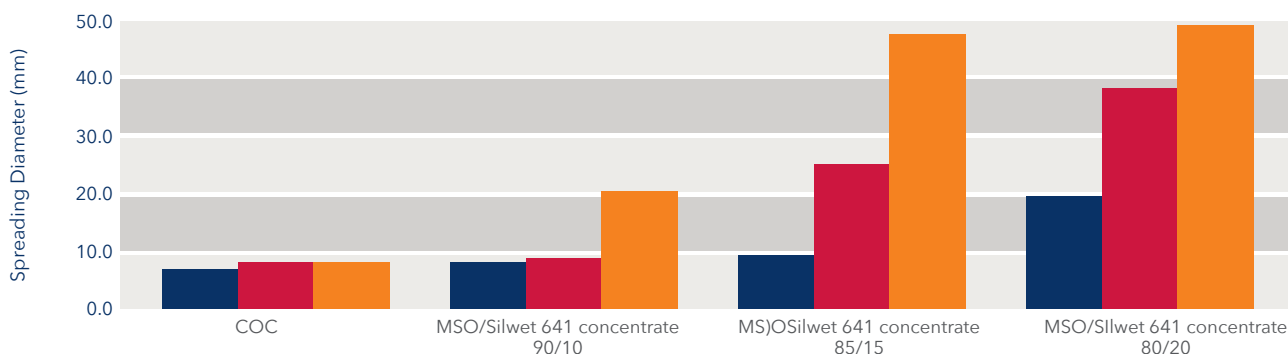


Typical properties are average data and are not to be used as or to develop specifications.

Product formulations are included as illustrative examples only. Momentive makes no representation or warranty of any kind with respect to any such formulations, including, without limitation, concerning the efficacy or safety of any product manufactured using such formulations.

(1) e.g. Canola, most grasses, cereals
 (2) e.g. Apple, Soy, Variegated thistle
 *Silwet is a trademark of Momentive Performance Materials Inc.

Figure 2: Dynamic Surface Tension (DST) of 10% Silwet 641 concentrate/ 90% MSO Formulation

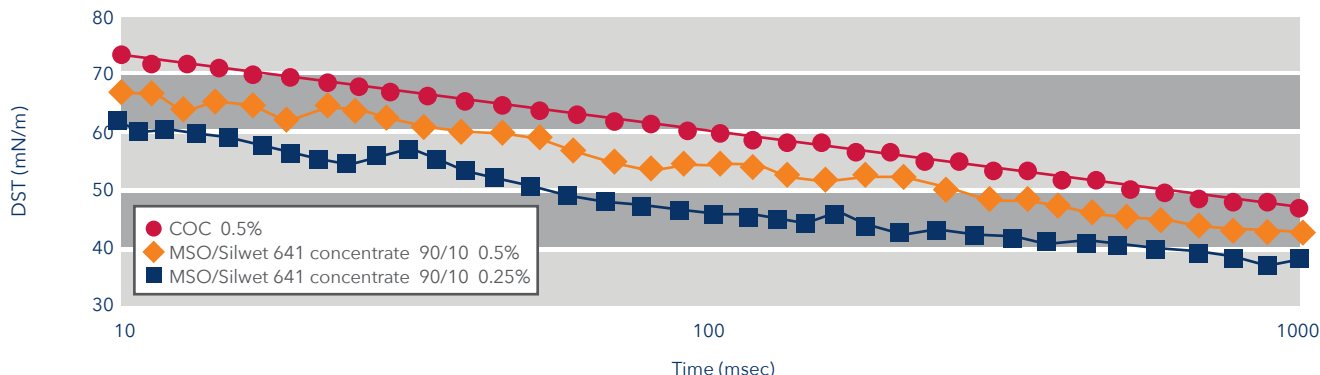

Note: Test data. Actual results may vary.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at www.momentive.com or, upon request, from any MPM representative.

For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Customer Service Centers

Worldwide

4information@momentive.com

T +1 614 986 2495

T +1 800 295 2392

North America**Silicones**

T +1 800 332 3390

**Consumer Sealants/
Construction Sealants
and Adhesives**

T +1 877 943 7325

Latin America**South America**

T +55 11 4534 9650

**Mexico and Central
America**

T +52 55 2169 7670

**Europe, Middle East,
Africa and India**

T +00 800 4321 1000

T +40 21 3111848

Pacific**China**

T +800 820 0202

T +86 21 3860 4892

Japan

T +0120 975 400

T +81 276 20 6182

Korea

T +82 2 6201 4600

Malaysia

T +60 3 9206 1532

Disclaimer

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.