

SAG* TP-325

SAG* TP-325

Description

SAG TP-325 silicone antifoam is based on a unique organosilicone structure, making it a new generation of antifoams for diesel fuel. SAG TP-325 silicone antifoam contains only 9.4% silicon.

Key Features and Benefits

- Enables longer storage stability for diesel fuels
- Permits fast and virtually complete filling of fuel tanks
- Helps maintain high performance in wet diesel fuel
- Minimizes silica deposits on fuel injection
- Provides excellent durability in wet and dry diesel fuels
- Requires low silicon level (one-half that of current state-of-the-art antifoam)
- Requires low usage levels – 5 ppm
- Quick foam knockdown
- Insoluble in water
- Halogen free

Typical Physical Properties

Appearance	Clear to slightly yellow
Form	Liquid
Apparent Specific Gravity at 20°C	1.03
Viscosity at 25°C, cSt	400
Refractive Index at 25°C	1.4450
Flash Point, Pensky-Martens Closed Cup, °C (°F)	103 (218)
Freezing Point, °C (°F)	<-32 (<-26)

Potential Applications

SAG TP-325 silicone antifoam is an excellent candidate for use in diesel additive packages (DAPs) and helps achieve cost-effective foam control of diesel fuels.

Processing Recommendations

In every case tested, SAG TP-325 silicone antifoam exhibited superior performance – at half the concentration – to the competitive state-of-the-art antifoam, especially in wet diesel fuel.

The performance of SAG TP-325 silicone antifoam and a competitive state-of-the-art antifoam was evaluated in various diesel fuels. The antifoams were incorporated in different DAPs at varying levels. These DAPs were added at 200 ppm to particularly high and low-foaming commercial diesel fuels and allowed to stand overnight in order to simulate typical use conditions. The studies were conducted according to the DHYCCA (Direction Française d’Hydrocarbures) test, which consists of injecting the diesel fuel at 1.5 bar into a graduated cylinder and measuring the collapse time.

The antifoams were evaluated in both “dry” diesel (50 ppm water) and “wet” diesel (1000 ppm water). The final concentration of SAG TP-325 silicone antifoam was 7.5 ppm for high-foaming and 5 ppm for low-foaming diesel fuel. The competitive antifoam concentration, based on supplier-recommended addition rates, was 15 ppm and 10 ppm, respectively. Results of the eight-week test are summarized in Table 1 (high-foaming) and Table 2 (low-foaming).

Relative defoam times are shown in Figures 1 and 2 for high-foaming diesel fuel and in Figures 3 and 4 for low-foaming diesel.

Table 1: Antifoam Performance in High-Foaming Diesel Fuel

Test Sample	Antifoam Level, ppm	Defoam Time, sec		Defoam Time (at 8 wks) Relative to Control, %
		Initial	After 8 wks	
Dry Diesel Fuel ⁽¹⁾				
Control (Neat Diesel)	—	62	78	—
With SAG TP-325 silicone antifoam	7.5	8	9	11
With State-of-the-Art AF	15	10	11	14
Wet Diesel Fuel ⁽²⁾				
Control (Neat Diesel)	—	56	78	—
With SAG TP-325 silicone antifoam	7.5	5	9	11
With State-of-the-Art AF	15	19	31	40

(1) 50 ppm water

(2) 1000 ppm water

Table 2: Antifoam Performance in Low-Foaming Diesel Fuel

Test Sample	Antifoam Level, ppm	Defoam Time, sec		Defoam Time (at 8 wks) Relative to Control, %
		Initial	After 8 wks	
Dry Diesel Fuel ⁽¹⁾				
Control (Neat Diesel)	—	27	37	—
With SAG TP-325 silicone antifoam	5	8	9	11
With State-of-the-Art AF	10	10	11	14
Wet Diesel Fuel ⁽²⁾				
Control (Neat Diesel)	—	27	33	—
With SAG TP-325 silicone antifoam	5	3	4	12
With State-of-the-Art AF	10	7	12	32

(1) 50 ppm water

(2) 1000 ppm water

Figure 1: Relative Defoam Time of Antifoams as Measured in Dry High-Foaming Neat Diesel Fuel

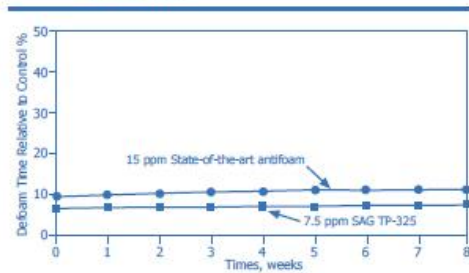


Figure 3: Relative Defoam Time of Antifoams as Measured in Dry Low-Foaming Neat Diesel Fuel

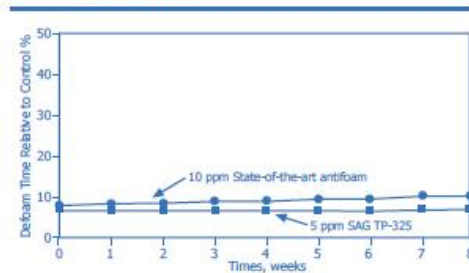


Figure 2: Relative Defoam Time of Antifoams as Measured in Wet High-Foaming Neat Diesel Fuel


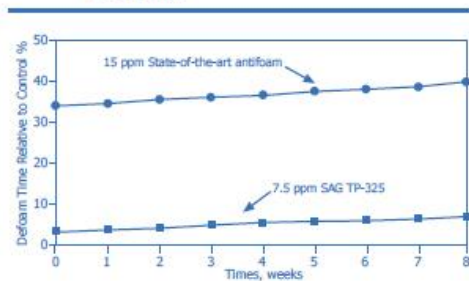


Figure 4: Relative Defoam Time of Antifoams as Measured in Wet Low-Foaming Neat Diesel Fuel

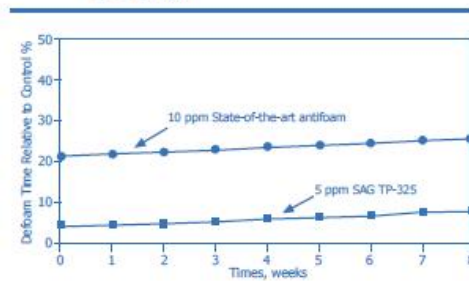

Critical Antifoam Concentration


Antifoam performance may be lost below a certain critical concentration; it will depend on the diesel fuel and the DAP.

Figure 5 shows the effect of low silicon concentrations for SAG TP-325 silicone antifoam measured in a typical diesel fuel. The critical concentration corresponds to the sharp change in the curve and occurs at

around 0.4-0.5 ppm silicon for TP-325 silicone antifoam compared to 0.9-1.0 ppm for the typical diesel fuel antifoam.

The results are expressed as a percentage of the defoam time for the control (neat diesel fuel).

Figure 5: Relative Defoam Times of Antifoams vs. Silicon Concentration in a Typical Diesel Fuel

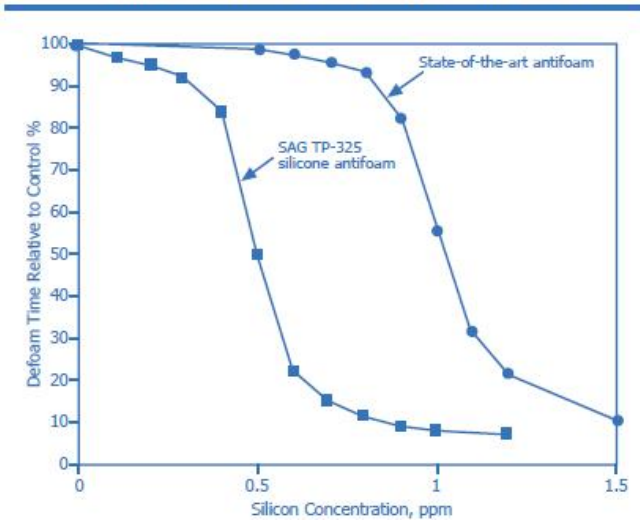

Availability

SAG TP-325 silicone antifoam is available in 200-kg drums. Alternate packaging is available upon request.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at www.momentive.com or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Contact Information

For product prices, availability, or order placement, contact our customer service at Momentive.com/CustomerService/

For literature and technical assistance, visit our website at: www.momentive.com

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY “SUPPLIER”), ARE SOLD SUBJECT TO SUPPLIER’S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER’S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Supplier’s materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier’s products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier’s standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

*SAG is a trademark of Momentive Performance Materials Inc.1033

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.