

SiTRUST* TSE3664K

Description

SiTRUST TSE3664K is a two-component condensation cure silicone rubber designed for electric potting. TSE3664 K cures at room temperature to form an elastic flame retardant rubber and adheres various types of materials such as metal, plastics, glass and ceramics without the use of primers.

Key Features and Benefits

- flame retardant: UL94V-0 recognized (File No. E56745)
- low viscosity allows for excellent flowability
- fast cure
- excellent deep section cure
- excellent adhesive properties: primerless adhesion to many types of substrates
- no cure inhibition

Typical Physical Properties

Typical Physical Properties (JIS K 6249)		
Uncured Properties (23°C, 50%RH)	TSE3664K(A)	TSE3664K(B)
Appearance	Gray	Blue
Specific Gravity	1.41	1.08
Viscosity Pa•s	4.0	0.01
Mixing Ratio by Weight	100:7.5	
Mix Ratio by Volume	100:10	
Viscosity after Mixing Pa•s	3.0	
Pot Life h	0.1	
Tack Free Time min	20	
Cured Properties (3 days @ 23°C, 50%RH)		
Appearance	Elastic rubber, Gray	
Density g/cm ³	1.41	
Hardness (Type A)	60	
Tensile Strength MPa	3.0	
Elongation %	70	
Adhesive Strength (GL lap share) MPa	1.0	

Volume Resistivity $\Omega \cdot m$	5.0 x 10 ¹⁵
Dielectric Strength kV/mm	26
Dielectric Constant (60Hz)	3.1
Dissipation Factor (60Hz)	0.01
Thermal Conductivity(1) W/m•K	0.4

1) In-house test method


Typical property data values should not be used as specifications.

Adhesion Capability


Aluminum	O
Stainles Steel	O
Copper	O
Polyester	O
Epoxy Resin	O
Polycarbonate	O
Acrylic Resin	X
ABS	X
PBT (Polybutylene terephtharate)	X
PPS (Polyphenylene sulfide)	X
PET (Polyethylene terephtharate)	X
Noryl (PPO=Polyphenylene oxide)	O
Phenolic Resin	O
Nylon-6	X
Nylon-66	X
Glass	O
PVC (Polyvinylchloride)	X
Steel	O
PP (Polypropylene)	X
PE (Polyethylene)	X

O: Excellent (Cohesive failure) X: Poor (Adhesive failure)

Cure Property: Viscosity (23°C, 50%RH)

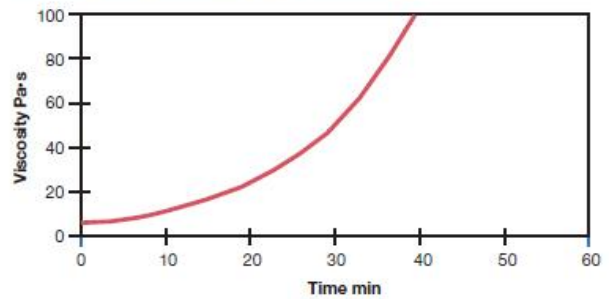

Cure Property: Hardness (23°C, 50%RH)

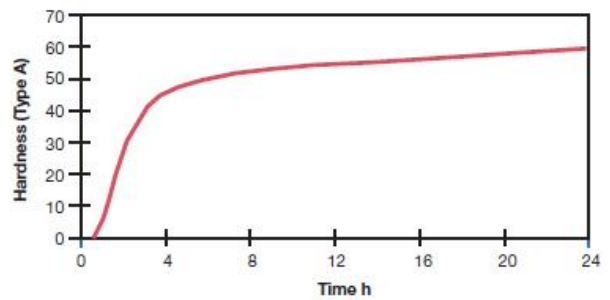

Potential Applications

- potting of electric and communications parts
- moisture proof sealing of meters
- moisture proof coating of electric circuit boards

Processing Recommendations

Mixing

In case of filler sedimentation of (A) component during storage, mix it homogeneously before using. Select a mixing container 4-5 times larger than the volume of silicone rubber compound to be used. Weight out (A) and (B) with clean tools, thoroughly mix them, scraping the sides and the bottom of the container carefully to produce a homogenous mixture.

Deaeration and Curing

Air entrapped during mixing should be removed to eliminate voids in the cured rubber. Expose the mixed material to a vacuum of about 20mm of mercury. The material will expand, crest, and recede to about the original level as the bubbles break. Degassing is usually complete about two minutes after frothing ceases. Pour the material in the part, and leave it with the room temperature.

Patent Status

Standard copy to come

Product Safety, Handling and Storage

Standard copy to come

Limitations

Standard copy to come

Contact Information

For product prices, availability, or order placement, contact our customer service at [Momentive.com/Customerservice/](https://www.momentive.com/Customerservice/)

For literature and technical assistance, visit our website at: www.momentive.com

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY “SUPPLIER”), ARE SOLD SUBJECT TO SUPPLIER’S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER’S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier’s materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating

Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

*SiITRUST is a trademark of Momentive Performance Materials Inc.

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.