

TSE3663

Description

TSE3663 is a two-component condensation cure silicone rubber for electronic potting. TSE3663 cures at room temperature to form an elastic rubber and adheres to various materials such as metal, plastics, glass and ceramics without the use of primers.

Key Features and Typical Benefits

- Self bonding, good primerless adhesion to many substrates such as metals, glass and many types of plastics
- Good deep section cure
- Excellent dielectrical properties
- Low viscosity


Typical Physical Properties

Property	Unit	Value	
		TSE3663 (A)	TSE3663 (B)
Colour		white	Pale yellow
Density (23 °C)	g/cm ³	1,19	1.01
Viscosity (23 °C)	mPa·s	5000	6
Mix Ratio by Weight		100 : 2	
Viscosity After Mixing (23 °C)	mPa·s	4000	
Pot Life (23 °C)	h	0.5	
Cure Time (25 °C)	h	24	
Cured Properties (3 days at 23 °C)			
Density (23 °C)	g/cm ³	1.20	
Hardness (Type A)		41	
Tensile Strength	MPa	1.4	
Adhesive Strength ⁽¹⁾	MPa	0.9	
Elongation	%	100	
Thermal conductivity	W/m·K	0.27	
Volume resistivity	Ω·cm	1.0 x 10 ¹⁵	
Dielectric constant (60 Hz)		31	
Dissipation Factor (60 Hz)		0.02	
Dielectric strength	kV/mm	24	

Typical physical properties are average data and should not be used as or to develop product specifications.

⁽¹⁾Aluminum Lap Shear

CURING AGENT LEVEL VS VISCOSITY CHANGE (25°C)

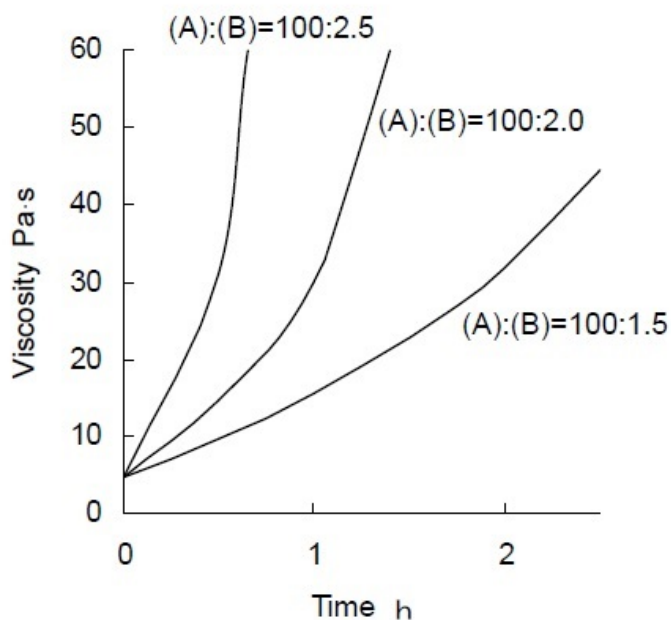

Note: Test results. Actual results may vary.

Curing Agent Levels and Physical Properties

Properties		Mix Ratio By Weight (A) : (B)		
		100 : 1.5	100 : 2	100 : 2.5
Density (23 °C)	g/cm ³	1.19	1.19	1.20
Hardness (Type A)		30	42	47
Tensile Strength	MPa	1.1	1.4	1.8
Elongation	(%)	160	110	120

Note: Test data. Actual results may vary.

Potential Applications

- Waterproof sealing. Bonding and potting for electrical parts and electronics devices
- Coating of Printed circuit Boards (PCB's)

Processing Recommendations

Mixing

Since settling of filler occurs during storage, TSE3663(A) base compound should be thoroughly stirred in the original container before mixing together with TSE3663(B) catalyst.

After mixing the TSE3663(A) select a mixing container 4-5 times larger than the volume of RTV silicone rubber compound to be used. Weigh out the quantities of TSE3663(A) and TSE3663(B) needed.

With clean tools, thoroughly mix the A and B components together, scraping the sides and bottom of the container carefully to produce a homogeneous mixture. When using power mixers, avoid excessive speeds, which could entrap large amounts of air or cause overheating of the mixture, resulting in shorter pot life.

Deaeration

Air entrapped air during mixing should be removed to eliminate voids in the cured product. Expose the mixed material to a vacuum of about 30 mbar. The material will expand, crest, and recede to about the original level as the bubbles break. Degassing is usually complete about two minutes after frothing ceases. When using the RTV silicone rubber compound for potting, a deaeration step may be necessary after pouring to avoid capturing air in complex assemblies.

Availability

TSE3663(A) component is available in 1kg cans and 18kg pails.

TSE3663(B) component is available in 500g bottles.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at www.momentive.com or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Contact Information

For product prices, availability, or order placement, contact our customer service at Momentive.com/CustomerService/

For literature and technical assistance, visit our website at: www.momentive.com

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY “SUPPLIER”), ARE SOLD SUBJECT TO SUPPLIER’S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER’S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Supplier’s materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier’s products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier’s standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.