

## **SiIFORT\* AS4000**

### **SiIFORT\* AS4000**

#### **Description**

##### **SiIFORT AS4000 Hard Coat**

AS4000 premium-performance hard coat is a clear, non-yellowing silicone coating which provides optimal protection against deterioration from weather, including ultraviolet rays, heat, cold, rain, snow and ice. It also resists damage from sand and dirt. AS4000 may be used with any of the following primers: LHP100PM, SHP401.

##### **SiIFORT SHP401 Primer**

SHP401 primer is used as an adhesion promoter for AS4000 hard coat on polycarbonate parts. It can be applied by flow, dip or spray coating. The primer is designed to air dry and should be tack free in about 10 minutes.

The AS4000/SHP401 coating system passes the requirements of the DOT FMVSS#108 and is included in the AMECA List of Acceptable Plastics for Optical Lenses and Reflectors Used on Motor Vehicles. It also complies with the ECE Automotive Regulations for European forward lighting applications.

#### **Key Features and Benefits**

##### **AS4000 Hard Coat**

- Ultraviolet resistance

- Thermal resistance
- Abrasion and mar-resistance
- Good clarity
- Solvent/chemical resistance

**SHP401 Primer**

- No thermal cure required
- Improves coating adhesion
- Improves water resistance
- Improves ultraviolet resistance

**Typical Physical Properties**

Property	AS4000 Hard Coat Values	SHP401 Primer Values
Solids Content, %	20 ± 1	2.1 ± 0.2
Solvent	Methanol, n-butanol, isopropanol	1-Methoxy-2-propanol, diacetone alcohol
Flash Point, Penske-Martens Closed Cup	19.4°C (67°F)	36.1°C (97°F)
Density, lbs/gal (g/cc)	7.6 ± 0.1 (0.91)	7.7 ± 0.1 (0.925)
pH	7.0 ± 0.5	-
Warranty Period in original sealed containers	3 months at ≤10°C (50°F)	6 months at ambient temperature
Viscosity, cstk @ 25°C	4-7	4-7
VOC, g/l	728	907

SHP401 Primer/AS4000 Hard Coat on transparent Polycarbonate (0.5 micron primer/5.0 microns top coat)

Taber Abrasion <sup>1</sup>	≤ 10 d% Haze
Water Immersion <sup>2</sup>	≥ 250 Hrs.
UV-B <sup>3</sup>	≥ 3,000 Hrs.
#0000 Steel Wool <sup>4</sup>	No visual scratches
Impact Resistance <sup>4</sup>	No fracture or chipping
Heat/Humidity/Cold Cycle Test <sup>5</sup>	Passed 15 cycle (90 days)

1 Taber Abrader with 500g load, CS10F wheels at 500 cycles. Haze measured per ASTM D1003. Higher haze indicates greater abrasion. Humidity during coating and Taber wheel variability will affect final values.

2 Temperature = 65°C.

3 Exposure data on UV instrument manufactured by Q Panel Corp. Cycle is 8 hours, FS 40 lamps on at 70°C and 4 hours off with condensing humidity at 50°C.

4 FMVSS 108


5 GM MG5060

**Chemical/Solvent Resistance**








Ethylene Glycol Antifreeze	Windshield Washer Fluid
Heavy Duty Brake Fluid (Glycol)	Tar Remover
Gasoline (Leaded) or Petrol	Power Steering Fluid
Wax Remover	Sulfuric Acid (0.1N)
Heavy Duty Detergent 10W40 Motor Oil	Sodium Hydroxide (0.1N)

WEATHERABILITY  
(On Polycarbonate)


FLORIDA/ARIZONA

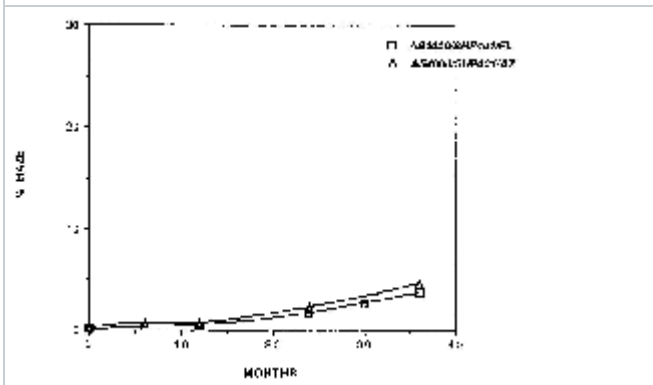

FRESNEL

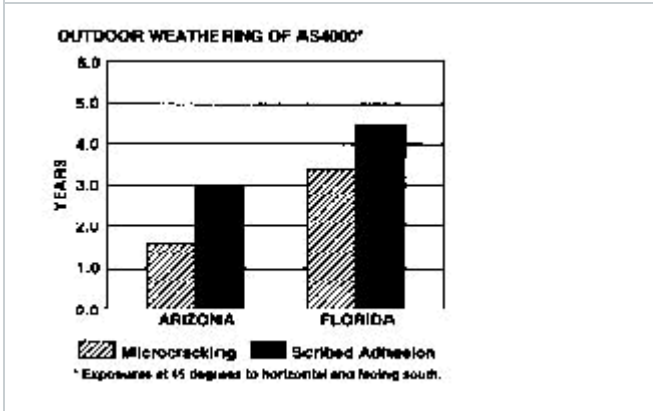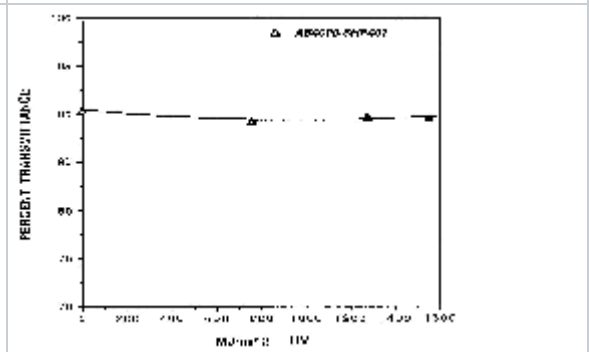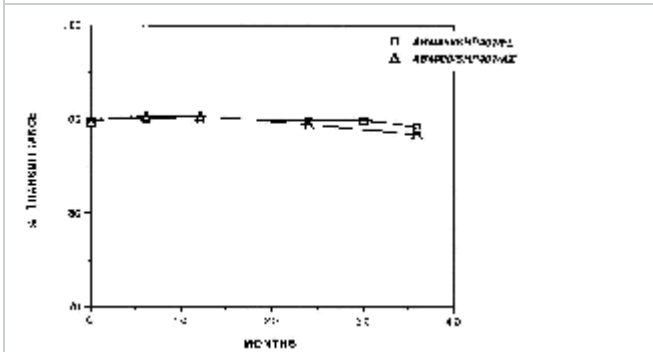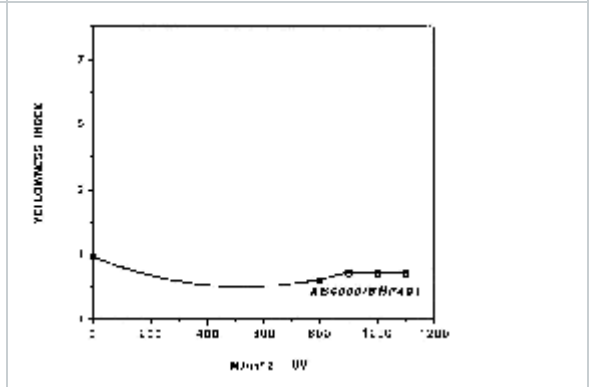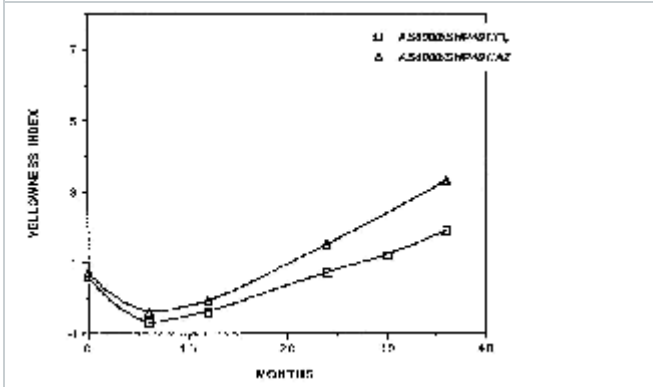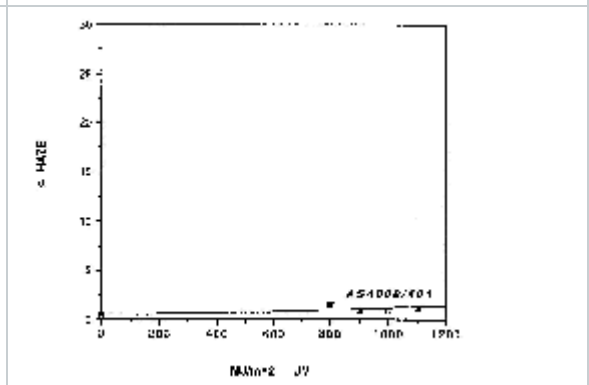

UV-B WEATHERABILITY

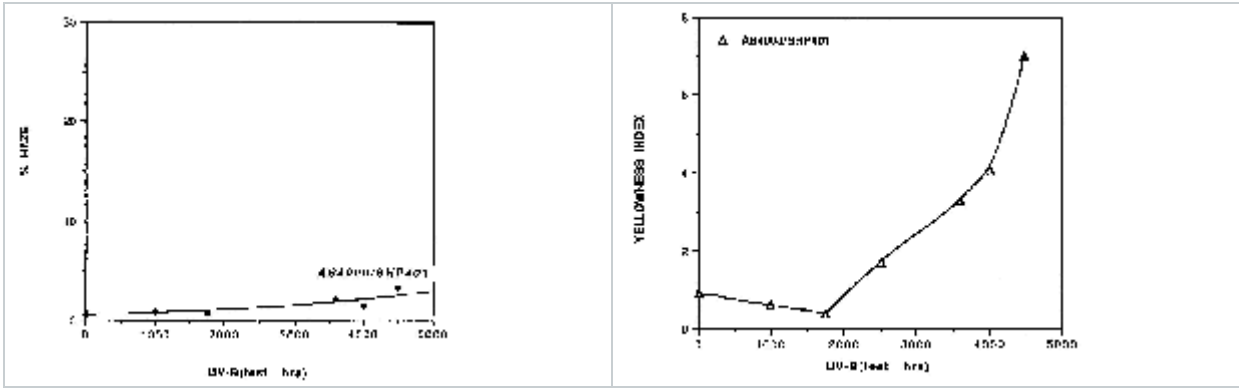

**Patent Status**

Standard copy to come

**Product Safety, Handling and Storage**

**CAUTION**

Compatibility of Momentive Performance Materials hard coat and polycarbonate resins, is dependent on a number of factors including operational stresses, chemical exposure, temperature levels, impact and exposure to ultraviolet light.

While it is up to the end user to determine what application specific testing is appropriate, it is suggested that all polycarbonate resin applications be tested for at least thirty (30) days for compatibility and crazing with this hard coat use. There is no dependable substitute for careful testing of prototypes of production parts in typical operating environments.

**AS4000 Hard Coat**

Refrigeration is required.

The warranty period is 3 months from date of shipment from Momentive Performance Materials if stored in the original unopened container at <-15°C / <5°F or lower.

**SHP401 Primer**

Store and ship at ambient temperature approximately 2 - 43°C (35 - 110°F)

When stored in original sealed containers, SHP401 primer will have a warranty period

of 6 months. Exposure to low temperatures may cause some solid precipitation. If this occurs, the precipitate may be re-dissolved by submerging the closed container in a water bath. Mix until homogeneous.

Standard copy to come

## **Processing Recommendations**

### **General Requirements**

Coating area should be clean, dust-free (Class 10,000 or better), well-ventilated and with the relative humidity controlled to  $40 \pm 10\%$ . If necessary, parts should be washed or wiped clean with isopropyl alcohol, a mild detergent solution and clean water rinse, followed by a filtered-air blowoff and a final ionized-air blow-off. Cleanliness is critical for the production of good parts. Both primer and hard coating solutions should be filtered continuously or just prior to use to approximately 0.5 to 1.0 micron, using a 3 to 5 micron prefilter. Electric or indirect gas-fired ovens with good convection and air exchange are recommended.

### **AS4000 Hard Coat**

The hard coat can be applied to primed parts by dip, spray, or flow coating. For spray applications and large-part flow coating, the coating can be reduced to 15% solids with an appropriate solvent (e.g. n-butanol or IPA). Topcoat should be applied to result in a cured film thickness of 0.18 to 0.26 mil (4.5 to 6.5 microns) or thicker, depending on application. The coating should be allowed to dry at room temperature until tack free, 10 to 20 minutes. After the part reaches a temperature of 130°C (266°F), AS4000 cures to an abrasion resistant hard coat in 30 to 60 minutes.

### **SHP401 Primer**

The primer can be applied by dip, spray or flow coating to polycarbonate parts that have an initial stress level under 1000 psi. If a higher stress level is found to exist, the tool and molding conditions should be adjusted to reduce residual stress on parts. Alternatively, parts can be annealed to reduce stress, (for example, 30 minutes at 130°C (266°F) for each 100 mils of part thickness.) If necessary, primer solids content

may be reduced by adding 1-Methoxy-2-Propanol/diacetone alcohol (85/15) or pure 1-Methoxy-2-Propanol. The primer should be applied to obtain a dry film thickness of approximately 0.5 micron. After application, the primer should air dry until tack free (approximately 10 minutes). Recirculate the primer through a 1 or better micron filter.

## Limitations

Standard copy to come

## お問合せ窓口

製品の価格、取り扱い状況およびご注文については、[Momentive.com/Contact us/CustomerService/](http://Momentive.com/Contact us/CustomerService/)からカスタマーサービスへご連絡ください。

パンフレットおよび技術情報については、弊社ウェブサイト[www.momentive.com](http://www.momentive.com)をご覧ください。

## 免責条項:

モメンティブ・パフォーマンス・マテリアルズならびにその子会社および関係会社(以下、総称して「サプライヤー」といいます)の素材、製品およびサービスは、サプライヤーの標準販売条件に基づき販売されています。この標準販売条件は、該当する販売代理店契約または販売契約に含まれており、注文確認書や請求書の裏面に印刷され、また要求に応じて提供可能です。本書に記載の情報、推奨、または提言は、誠意をもって提供されていますが、サプライヤーは明示的にも黙示的にも、(i)本書に記載の結果が最終使用条件下でも得られること、および(ii)製品、素材、サービス、推奨または提言に取り入れられている設計の有効性もしくは安全性について、いかなる保証もいたしません。サプライヤーの標準販売条件に定めのあるものを除き、サプライヤーおよびその代理人は、本書に記載の素材、製品またはサービスの使用によって生じたいかなる損害に対しても責任を負わないものとします。サプライヤーの素材、サービス、推奨、または提言が、ユーザー自身の特定の使用目的に適しているか否かの判断については、各ユーザー自身が全面的に責任を負います。各ユーザーは、すべてのテストや分析を特定および実施して、サプライヤーの製品、素材、またはサービスが組み込まれている最終製品が安全であり、最終使用条件における使用に適していることを確認する必要があります。サプライヤーの署名入りの書面による合意がない限り、本書もしくはその他の文書または口頭による推奨または提言は、サプライヤーの標準販売条件の規定または本免責条項の変更、修正、優先、または権利放棄とはみなされないものとします。本書に含まれる素材、製品、サービスまたは設計の使用可能性または使用提案に関するいかなる記載も、当該使用または設計を対象とするサプライヤーの特許その他の知的財産権に基づくライセンスを付与することを意図してはならず、あるいはライセンスの付与と解釈してはならず、また、何らかの特許その他の知的財産権を侵害する素材、製品、サービスまたは設計の使用の提案

を意図しておらず、また使用提案として解釈してはなりません。

Momentive および Momentiveのロゴは、Momentive Performance Materials Inc.の商標です。