Technical Data Sheet



SAG™ 1599

SAG* 1599

Description

SAG 1599 is a foam control agent designed for use in agricultural formulations that contain high concentrations of ammonium sulfate (AMS) or other ionic nutrients and electrolyte-tolerant surfactants such as alkylated polyglucosides (APG). When properly dispersed into the high-electrolyte fertilizers or water conditioners, it has shown to provide excellent foam control without the separation problems commonly associated with traditional silicone antifoams.

Key Features and Benefits

- Excellent foam control in AMS/APG containing products.
- Performs well in concentrated product and when diluted to end-use concentrations
- Good long-term stability
- The components of SAG 1599 meet the requirements of U.S. EPA regulation 40 CFR 180.960 and are therefore exempt from tolerances in food when used as inert ingredients in agricultural applications in accordance with the other conditions of that regulation.

Typical Physical Properties

Property	Typical Value	
Appearance	opaque liquid	
Viscosity (25°C)	10,000 - 40,000 cps	
Flash Point (ASTM D93)	229°C	
Boiling Point	>150°C	
Freezing Point	-31°C	
Density	1.027 g/cc	
Solubility in water (20°C)	insoluble	

Performance Data


The foam control properties of SAG 1599 in a high AMS/APG product are compared to those of SAG 47, a traditional silicone antifoam typical of those currently being used in Figure 1. It can be seen at concentrations as low as 50 ppm the SAG 1599 is a significantly better antifoam that the SAG 47 dosed at 2000 ppm.

in a High AMS/APG Foamant 120 → SAG 47 → SAG 1599 100 Defoam Time (seconds 80 SAG 47 40 20 SAG 1599 200 400 600 800 1000 1200 1400 1600 1800 2000 FCA Concentration (ppm)

Fig 1: Dilution Studies comparing SAG 1599 & SAG 47

The data in Figure 2 show the long-term antifoam properties that SAG 1599 imparts to AMS/APG products and demonstrate that foam control is maintained even after diluting to end-use concentrations.

Foam Control Performance of SAG 1599

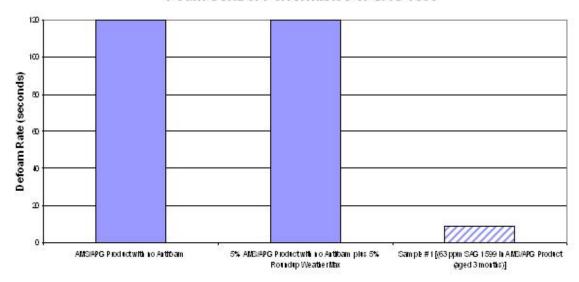

Note: The maximum foamtime recorded by the Shake Foam Test is 120 seconds. Actual defoamtime could be significantly longer.

Patent Status

Standard copy to come

Product Safety, Handling and Storage

Standard copy to come

Limitations

Standard copy to come

Contact Information

Email

commercial.services@momentive.com

Telephone

Americas	Latin America	EMEAI- Europe, Middle East, Africa & India	ASIA PACIFIC
+1 800 295 2392	Brazil	Europe	China
Toll free*	+55 11 4534 9650	+390510924300	800 820 0202
+704 805 6946	Direct Number	Direct number	Toll free

Direct Number +86 21 3860 4892

Direct number

*All American Mexico India, Middle East & Africa Japan

countries +52 55 2169 7670 + 91 44 71212207 +81 3 5544 3111

Direct Number Direct number* Direct number

*All Middle Eastern Korea

countries, Africa, India, +82 2 6201 4600

For literature and technical assistance, visit our website at: www.momentive.com

DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY **USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or

other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

*SAG™是 Momentive Performance Materials Inc. 的商标

The use of the "TM" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.