

## TIA225GF

Liquid-Dispensed Silicone Thermal Pad

### Description

**TIA225GF** silicone is a two-component thermally conductive material that is dispensed as a liquid and cured in place to create a heat path for efficient heat transfer. After being applied, its non-slumping pasty consistency provides physical stability to help prevent run-off after being dispensed. TIA225GF can be used as a liquid-dispensed alternative to pre-fabricated thermal pads, and as a gap filler for a broad array of thermal designs in electronic components.

### Key Features and Typical Benefits

- Good thermal conductivity
- Fast low-temperature cure
- Retains softness after cure to enhance stress relief during thermal cycling
- Easy to use 1:1 mixing ratio
- Conforms to complex shapes of three-dimensional interface designs
- Can be dispensed or printed
- Repairable
- Flame retardant: UL94V-0 equivalent

### Potential Applications

Thermal interface for electronic components in consumer, telecommunications, automotive, and lighting applications.

### Typical Physical Properties


Uncured Properties <sup>(†)</sup>		TIA225GF(A)	TIA225GF(B)
Appearance		Dark Gray	Light Gray
Viscosity (23°C)	Pa·s	100	100
Mixing ratio (by weight)		100 : 100	
Viscosity after mixing (23°C)	Pa·s	100	
Pot life	h	4	
Cure condition (70°C)	h	0.5	
(23°C)	h	24	

Cured Properties <sup>(†)</sup> (0.5h at 70°C)		TIA225GF
Appearance		Gray
Density (23°C)	g/cm <sup>3</sup>	2.90
Thermal conductivity * <sup>1</sup>	W/(m·K)	2.5
Thermal resistance * <sup>2</sup> (BLT: 50µm)	mm <sup>2</sup> ·K/W	35
Hardness (Type E)		50
Tensile strength	MPa	0.4
Elongation	%	70
Volume resistivity	MΩ·m	6.0×10 <sup>6</sup>
Dielectric strength	kV/mm	20
CTE * <sup>3</sup>	ppm/K	120
Low volatile siloxane (D <sub>4</sub> -D <sub>10</sub> )	ppm	200
Flame retardant (UL94)		V-0 (planned)
Relative temperature index (RTI)		150°C (planned)

\*1: Hot wire method \*2,\*3: In-house test method

(†)Typical property data values should not be used as specifications. Typical properties are average data and are not to be used as or to develop specifications.

#### Hardness Scale Conversion Guide

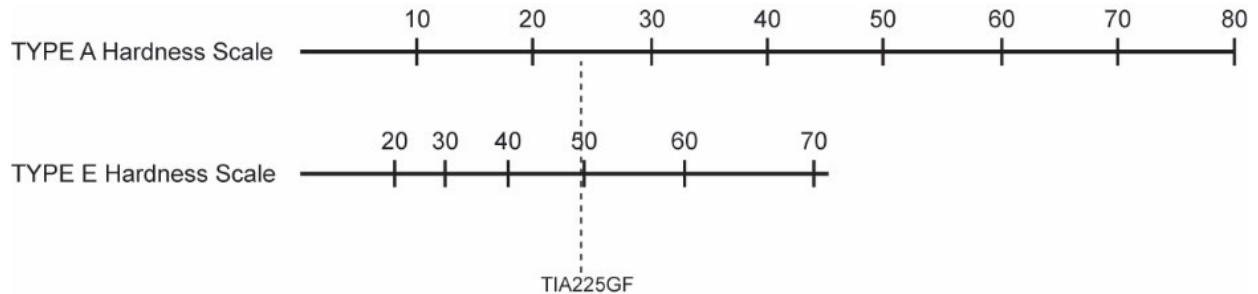

Test data. Actuals may vary.

#### General Considerations For Use

As materials such as water, sulfur, nitrogen compounds, organic metallic salts, phosphorus compounds, etc. contained in the surface of the substrate can inhibit curing, a preliminary test should be performed to determine compatibility.

While the typical operating temperature for silicone materials ranges from -45°C to 200°C, the long-term maintenance of its initial properties is dependent upon design related stress considerations, substrate materials, frequency of thermal cycles, and other factors.

#### Packaging

- TIA225GF(A): 25kg pail
- TIA225GF(B): 25kg pail

#### Patent Status

여기에 포함된 어떠한 내용도 관련 특허가 없음을 의미하거나 특허 소유자의 허가 없이 특허에서 다루는 발명을 실행하기 위한 허가, 유도 또는 권고를 구성하는 것으로 해석되어서는 안됩니다.

#### Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are

available at [www.momentive.com](http://www.momentive.com) or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

### Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

### Contact Information

Email

[commercial.services@momentive.com](mailto:commercial.services@momentive.com)

### Telephone

#### Americas

+1 800 295 2392

Toll free\*

+704 805 6946

Direct Number

\*All American countries

#### Latin America

##### Brazil

+55 11 4534 9650

Direct Number

##### Mexico

+52 55 2169 7670

Direct Number

#### EMEAI- Europe, Middle East, Africa & India

##### Europe

+390510924300

Direct number

##### India, Middle East & Africa

+ 91 44 71212207

Direct number\*

\*All Middle Eastern countries, Africa, India,

#### ASIA PACIFIC

##### China

800 820 0202

Toll free

+86 21 3860 4892

Direct number

##### Japan

+81 3 5544 3111

Direct number

##### Korea

+82 2 6201 4600

For literature and technical assistance, visit our website at: [www.momentive.com](http://www.momentive.com)

### DISCLAIMER:

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

The use of the "TM" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks

TIA225GF

of Momentive Performance Materials Inc.